


Installation Steps

5-b Wattage setting

DALI

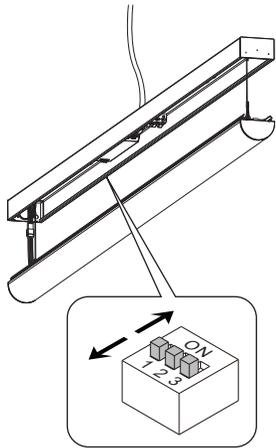


Output current [mA]	Switch position			Power [W]	1009258, 1009259					
	1	2	3		3000K		4000K		5000K	
					Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]
200	OFF	OFF	OFF	20	149.3	2970	161.5	3160	161.2	3230
250	ON	OFF	OFF	25	146.5	3660	161.0	3930	158.0	3970
325	OFF	OFF	ON	30	143.2	4280	159.3	4650	154.4	4650
375	OFF	ON	ON	35	139.3	4900	157.9	5400	150.2	5310


Output current [mA]	Switch position				Power [W]	1009260, 1009261					
	1	2	3	4		3000K		4000K		5000K	
						Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]
200	OFF	ON	OFF	OFF	28	150.6	4120	163.6	4410	162.7	4490
250	ON	ON	OFF	OFF	34	148.5	4960	163.1	5350	160.1	5400
300	ON	OFF	ON	OFF	41	144.9	5920	161.4	6460	156.3	6450
350	ON	ON	ON	OFF	48	141.3	6660	159.4	7340	152.4	7250

6 Connecting Power Supply


3 Wires specification:

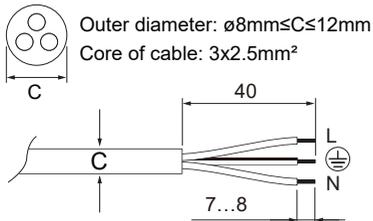

5 Wires specification:

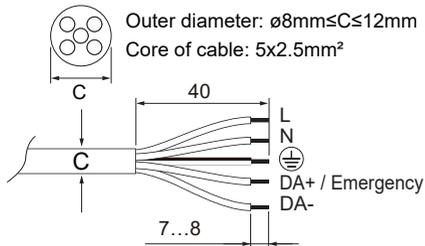

7 Assemble the housing

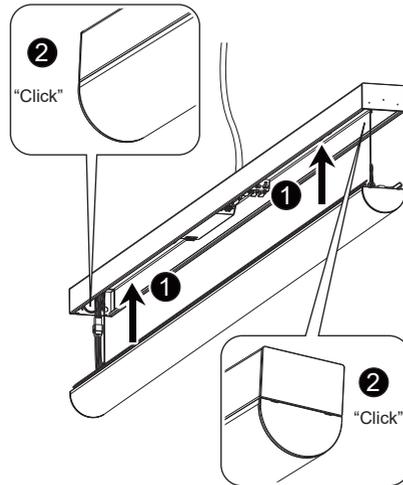

LED Batten P Installation Manual



IMPORTANT SAFETY NOTES




WARNING

RISK OF ELECTRIC SHOCK

BEFORE YOU BEGIN

- Read these instructions completely and carefully.
- The installation and connection of the luminaire must be done when switched off and by qualified people. Make sure no voltage while installation.



CAUTION


MAINTENANCE

- To avoid injuries, disconnect power to the light and allow the unit to cool down before performing maintenance.
- Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on an annual basis. Frequency of use and environment should determine this.
- The Covers should be cleaned periodically as needed to ensure continued photometric performance. Clean the Cover with a damp, non-abrasive, lintfree cloth. If not sufficient, use mild soap or a liquid cleaner. Do not use an abrasive, strong alkaline or acid cleaner as damage may occur.
- Inspect the topside on the luminaire to ensure that it is free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.



This product contains a light source of energy efficiency class D.

Products

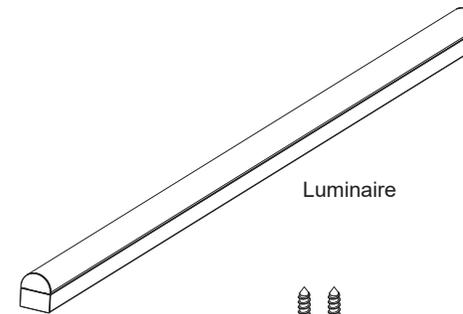

Luminaire




PA4x40mm



Expansion Tube


Optional

1009262



Steel cable suspension kits


Dimensions [mm]

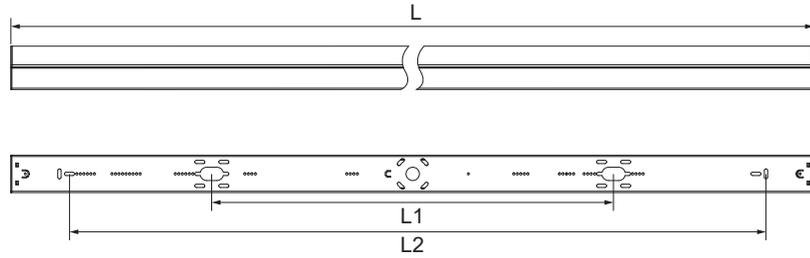


L	L1	L2
600	/	517
1200	600	1040
1500	600	1340

Installation Steps

- 1** Open the luminaire with a flat-head screwdriver

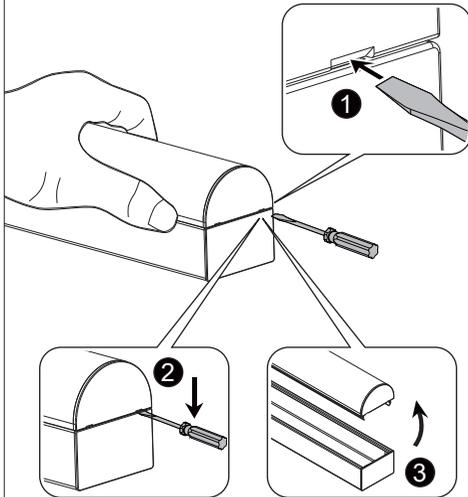


- 2** Thread the wire through the wire hole

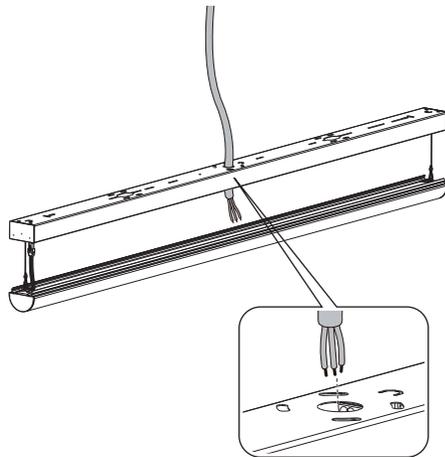


Installation Steps


- 3-a**
Surface mounted



- 3-b**
Suspended mounted



- 4** CCT Setting

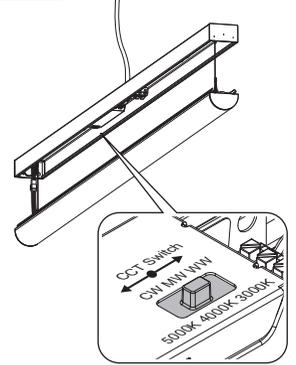

- 5-a** Wattage setting ON / OFF

Output current [mA]	Switch position		Power [W]	1009251					
	1	2		3000K		4000K		5000K	
				Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]
200	OFF	OFF	11	139.7	1540	152.2	1680	150.8	1660
250	OFF	ON	14	138.0	1930	152.1	2130	148.9	2080
300	ON	OFF	17	135.1	2300	150.6	2560	145.6	2470
350	ON	ON	20	131.4	2630	148.7	2970	141.8	2840

Output current [mA]	Switch position		Power [W]	1009252, 1009253, 1009254					
	1	2		3000K		4000K		5000K	
				Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]
200	OFF	OFF	20	149.3	2970	161.5	3160	161.2	3230
250	OFF	ON	25	146.5	3660	161.0	3930	158.0	3970
300	ON	OFF	30	143.2	4280	159.3	4650	154.4	4650
350	ON	ON	35	139.3	4900	157.9	5400	150.2	5310

Output current [mA]	Switch position		Power [W]	1009255, 1009256, 1009257					
	1	2		3000K		4000K		5000K	
				Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]	Light effect [lm/W]	Flux [lm]
200	OFF	OFF	28	150.6	4120	163.6	4410	162.7	4490
250	OFF	ON	34	148.5	4960	163.1	5350	160.1	5400
300	ON	OFF	41	144.9	5920	161.4	6460	156.3	6450
350	ON	ON	48	141.3	6660	159.4	7340	152.4	7250

