



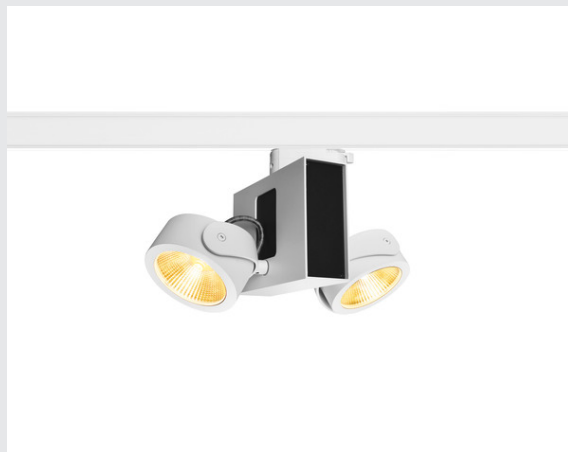

## TEC KALU double white/-black 24° 3000K

incl. 3-circuit adapter

The futuristic 240V TEC KALU with an appropriate adapter for the 3-circuit 240V track system has individually rotating and swivelling lamp heads with warm-white and dimmable premium LEDs. The built-in LED driver is located within the main structure. TEC KALU is supplied ready for direct connection to the 230V mains voltage supply.



### Tekniske data

|                           |                   |
|---------------------------|-------------------|
| Item no.                  | 1001428           |
| IP klasse                 | IP20              |
| Montering                 | Surface           |
| Monterings detaljer       | Track Ceiling     |
| Dæmpbar                   | Ja                |
| Dæmpningstype             | trailing edge     |
| Primær spænding           | 220-240V ~50/60Hz |
| Sekundær strøm / spænding | 700mA             |
| IP Tæthedsgard            | I                 |
| Watt                      | 31 W              |
| Min omgivelsestemperatur  | -20 °C            |
| Max omgivelsestemperatur  | 40 °C             |
| Lumen                     | 1900 lm           |
| Farvetemperatur           | 3000 Kelvin       |
| Spredningsvinkel          | 24 °              |
| Farve                     | white/black       |
| CRI                       | 80                |
| LXXBXX-data               | L70B50            |
| Længde                    | 29.5 cm           |
| Bredde                    | 17 cm             |
| Højde                     | 15.5 cm           |
| Nettovægt                 | 1.679 kg          |

Lyskilde

|        |                                                                                   |            |          |
|--------|-----------------------------------------------------------------------------------|------------|----------|
| 916610 |  | Bruttovægt | 2.129 kg |
|--------|-----------------------------------------------------------------------------------|------------|----------|