



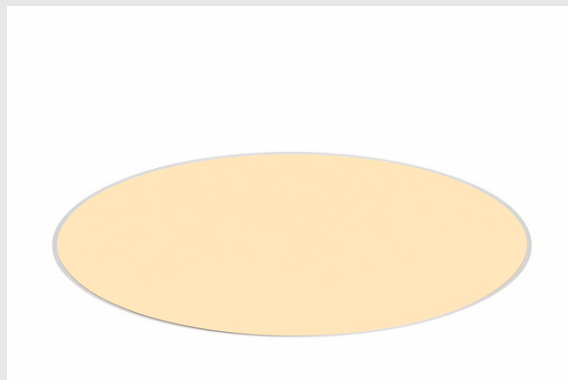

MEDO 60 EL

LED indoor recessed ceiling light, frameless version, white, 3000/4000K

The recessed version of the MEDO series fits into every room concept seamlessly thanks to its understated design. The MEDO Frameless combines with the ceiling in a charming way. The light colour can be easily switched between 3000K and 4000K prior to installation using a switch. The integrated premium LED module provides an even lighting effect. Supplemented by an additional driver, the TRIAC recessed variant becomes dimmable and can be integrated in DALI systems.



Tekniske data

Item no.	1001903
IP klasse	IP20
Montering	Recessed
Monterings detaljer	Ceiling
Sekundær strøm / spænding	1000/1050mA
IP Tæthedsgard	III
Watt	36 W
Max omgivelsestemperatur	40 °C
Lumen	4700/5000 lm
Farvetemperatur	3000/4000 Kelvin
Spredningsvinkel	105 °
Farve	white
CRI	80
UGR ≤	25
LXXBXX-data	L70B50
Højde	12.5 cm
Diameter	60 cm
Nettovægt	5.246 kg
Bruttovægt	7.406 kg
Indbygningsdybde	16 cm
Installations diameter	61 cm
BIG WHITE side	170

Lyskilde

916477	
--------	---

Tilbehør

1005387	LED Driver , 40W 1000- mA PHASE
1006120	LED driver , 40W 700/900/1000mA
1004782	LED driver , 31.5-44W 800/900/1050mA
1006197	LED driver , 40W 1050- mA DALI dimmable with RF interface LED driver white DALI
1002424	LED driver MEDO 400 , dimmable DALI/1-10V
464804	LED DRIVER , 40W, 1050mA, triac dimmable