



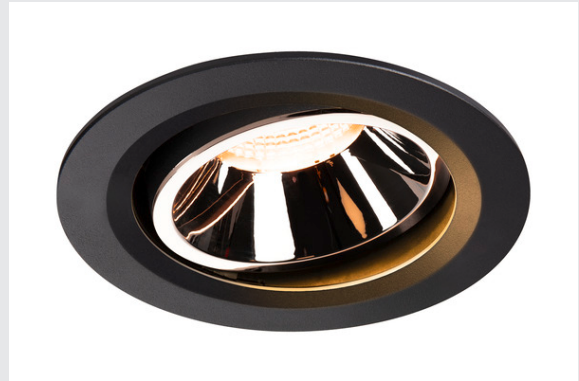

NUMINOS® MOVE DL L

Indoor LED recessed ceiling light black/chrome 2700K
20° rotating and pivoting

The NUMINOS light system from SLV combines technology, design and functionality like no other. This way, you can experience a thousand lighting design possibilities with a variety of downlights and spotlights. Like with the NUMINOS® MOVE DL L recessed ceiling light, which impresses with its high-quality workmanship and light. Ideal for harmonious, modern and space-saving lighting that directs the accent to objects or the room. The recessed ceiling light has a power consumption of 25.41 watts, a luminous flux of 2150 lumens, a colour temperature of 2700 Kelvin and a good colour reproduction index of over 90. This means that easy installation is a mere formality. When to choose NUMINOS from SLV – modular diversity awaits you.



Tekniske data

Item no.	1003627
Antal lysåbninger	1
IP klasse	IP20
IK Vandalklasse	IK02
Slagfaste	0.2 Joule
Montering	Recessed
Monterings detaljer	Ceiling
Sekundær strøm / spænding	700mA
IP Tæthedegrad	III
Watt	25.41 W
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	40 °C
Lumen	2150 lm
Farvetemperatur	2700 Kelvin
Spredningsvinkel	20 °
Farve	black/chrome
CRI	90
UGR ≤	19
LXXBXX-data	L80B50
Højde	9.5 cm
Diameter	16 cm
Nettovægt	0.519 kg

Lyskilde

791800	
Tilbehør	
1006148	Numinos® L Reducing ring , round 240/150mm white
1006149	Numinos® L Reducing ring , square 240/150mm black
1004062	LED driver , 21-29.5W 500/600/700mA for Numinos Downlight Serie
1004795	NUMINOS® L , diffuser Prisma
1004796	NUMINOS® L , diffuser Frosted
1006460	LED bridge driver , 42W, 700mA for NUMINOS®, including radio interface for RF module, DALI
1004794	NUMINOS® L , diffuser Ellipse
1006150	Numinos® L Reducing ring , square 240/150mm white
1006454	RF module Casambi for LED bridge driver , single colour
1006199	RF module Zigbee for DALI LED bridge driver , single colour
1006147	Numinos® L Reducing ring , round 240/150mm black
1004070	LED driver , 40W 700mA DALI
1004797	NUMINOS® L , diffuser Wabe
1004065	LED driver , 30W 700mA

Bruttovægt	0.653 kg
Indbygningsdybde	10.5 cm
Installations diameter	14.5 cm
BIG WHITE side	87