



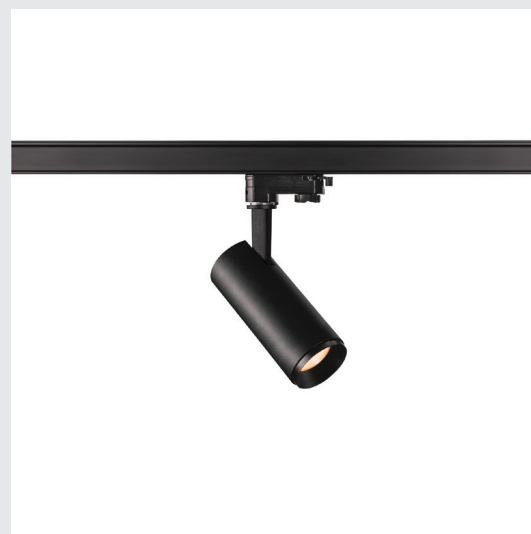

NUMINOS® S | 3Ph., PHASE

NUMINOS® S 3Ph., PHASE, 3~ Spotlight, cylindrical, 2700 K, 8 Watt, trailing edge, 36°, matt black

The NUMINOS® S 3-PHASE spotlight is a cylindrical luminaire designed for mounting on ceiling or wall track systems. It is primarily suitable for indoor use where targeted lighting is required. With a luminous flux of 950 lumens at 8 watts and a warm white colour temperature of 2700 K, it provides a pleasant light quality. The housing is made of aluminium and measures 16.2 cm in length with a diameter of 6.5 cm and a height of 14 cm. The spotlight features PHASE-cut dimming and has a beam angle of 36°. The IP20 protection rating makes it suitable for protected indoor areas. The declared service life is 50,000 hours.



Light source

2093870



Item no.	1004075
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Track
Assembly details	Ceiling, Wall,
Dimmable	true
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	8 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	128.0
Number of luminaires at LS C16A	128.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	36°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	16.2 cm
Height	14 cm
Diameter	6.5 cm
Net weight	0.51 kg

Accessories

1006167	NUMINOS® S, white front ring
1008144	NUMINOS® S, front ring, matt gold
1008140	NUMINOS® S, front ring, matt copper