



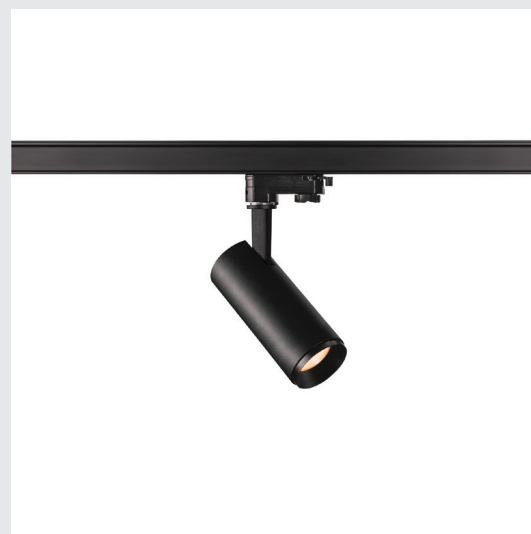

NUMINOS® S | 3Ph., PHASE

NUMINOS® S 3Ph., PHASE, 3~ Spotlight, cylindrical, 2700 K, 8 Watt, trailing edge, 60°, matt black

The NUMINOS® S 3Ph. is a cylindrical 3-phase spotlight designed for mounting on ceiling or wall track systems. With a power consumption of 8 watts, it delivers a luminous flux of 950 lumens at a colour temperature of 2700 Kelvin and a beam angle of 60 degrees. The housing is made of aluminium and finished in matte black. The luminaire features phase-cut dimming and is intended for indoor use with an IP20 protection rating. With a length of 16.2 cm, a diameter of 6.5 cm, and a height of 14 cm, the spotlight offers a compact design combined with a long service life of 50,000 hours.



Light source

2093870



Item no.	1004076
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Track
Assembly details	Ceiling, Wall,
Dimmable	true
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	8 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	128.0
Number of luminaires at LS C16A	128.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	60°
Color	black
CRI	90
UGR ≤	19
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	16.2 cm
Height	14 cm
Diameter	6.5 cm
Net weight	0.52 kg

Accessories

1006167	NUMINOS® S, white front ring
1008144	NUMINOS® S, front ring, matt gold
1008140	NUMINOS® S, front ring, matt copper