



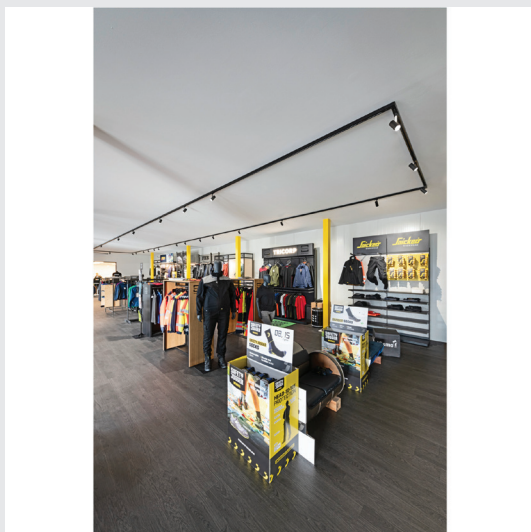

NUMINOS® S | 3Ph., PHASE

NUMINOS® S 3Ph., PHASE, 3~ Spotlight, cylindrical, 4000 K, 8 Watt, trailing edge, 24°, matt black

The NUMINOS® S 3Ph. is a three-phase spotlight with a cylindrical design, intended for mounting on ceiling or wall track systems. Typical applications are indoor areas where directional lighting is required. The spotlight delivers a luminous flux of 1100 lumens at a power consumption of 8 watts and a colour temperature of 4000 Kelvin. The beam angle is 24 degrees, allowing precise light control. The housing is made of aluminium and finished in matte black. Dimming is carried out via trailing edge PHASE control. With a product length of 16.2 cm, a diameter of 6.5 cm, and a height of 14 cm, the luminaire is compactly designed. The protection rating is IP20, making it suitable for use in dry indoor environments.



Light source

2093752



Item no.	1004090
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Track
Assembly details	Ceiling, Wall,
Dimmable	true
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	8 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	128.0
Number of luminaires at LS C16A	128.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	24°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	16.2 cm
Height	14 cm
Diameter	6.5 cm
Net weight	0.52 kg

Accessories

1006167	NUMINOS® S, white front ring
1008144	NUMINOS® S, front ring, matt gold
1008140	NUMINOS® S, front ring, matt copper