



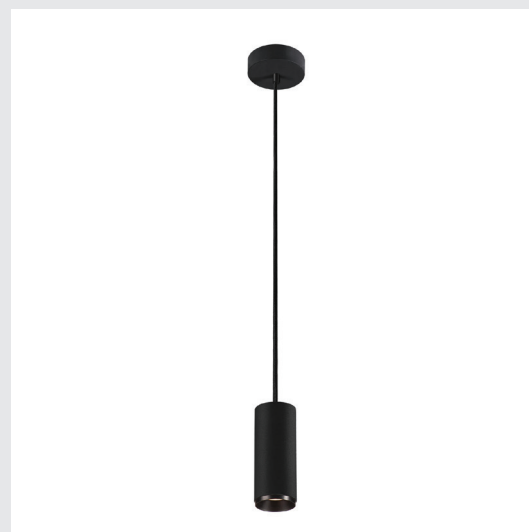

NUMINOS® S | PD, PHASE

NUMINOS® S PD, PHASE, Pendant light, pendant length 250 cm, 4000 K, 8 Watt, 24°, trailing edge, matt black

The NUMINOS® S PD PHASE is a cylindrical pendant luminaire characterised by its slim design and a suspension length of 250 cm. It is designed for indoor use, for example in offices, meeting rooms, or reception areas. The luminaire offers a luminous flux of 1100 lumens at a colour temperature of 4000 K and a beam angle of 24°, enabling focused and efficient lighting. The housing is made of aluminium combined with a polycarbonate optic diffuser, and the canopy has a ROUND design. The luminaire features PHASE-cut dimming, allowing easy adjustment of light intensity. The IP20 protection rating provides protection against solid foreign objects but no protection against water. With a declared lifetime of 50,000 hours, the luminaire is designed for long-lasting use.



Light source

2093752



Item no.	1004162
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	128
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	8 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	128.0
Number of luminaires at LS C16A	128.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	24°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	16.2 cm
Diameter	6.5 cm
Pendant length	250.0000 cm

Accessories

1006167	NUMINOS® S, white front ring
1008144	NUMINOS® S, front ring, matt gold
1008140	NUMINOS® S, front ring, matt copper