



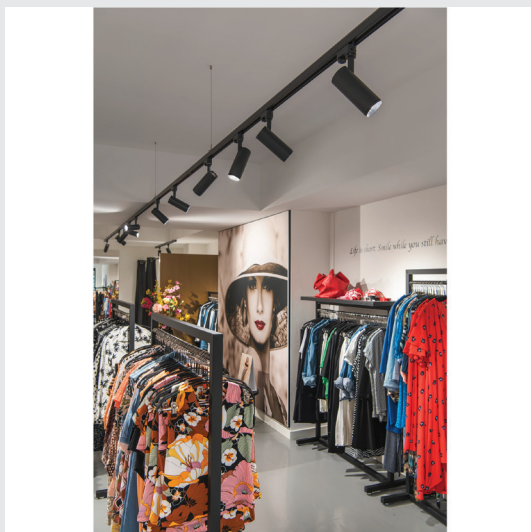

NUMINOS® M | 3Ph., PHASE

NUMINOS® M 3Ph., PHASE, 3~ Spotlight, cylindrical, 4000 K, 14 Watt, trailing edge, 36°, matt black

The NUMINOS® M 3Ph. is a cylindrical 3-phase spotlight for the ceiling track system, designed for indoor use. With a luminous flux of 1950 lumens at 14 watts and a colour temperature of 4000 K, it provides a neutral light colour and a beam angle of 36°. The housing is made of aluminium and finished in matt black. The luminaire features trailing edge phase-cut dimming and is rated IP20 for protection against contact and solid foreign objects. Its compact dimensions of approximately 18.5 cm in length, 8.5 cm in diameter, and 15.5 cm in height allow for flexible integration into various interior lighting applications. The declared service life is 50,000 hours.



Light source

2093757



Item no.	1004187
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Track
Assembly details	Ceiling,
Dimmable	true
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	14 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	78.0
Number of luminaires at LS C16A	78.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	36°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	18.5 cm
Height	15.5 cm
Diameter	8.5 cm
Net weight	0.8 kg

Accessories

1006168	NUMINOS® M, white front ring
1008145	NUMINOS® M, front ring, matt gold
1008141	NUMINOS® M, front ring, matt copper