



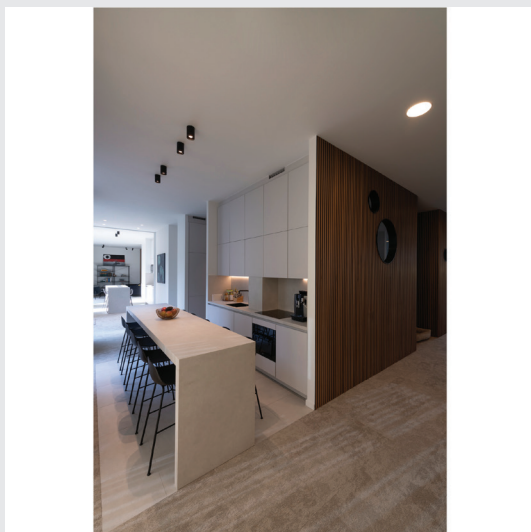

NUMINOS® M | CL, PHASE

NUMINOS® M CL, PHASE, Surface-mounted ceiling light, 3000 K, 14 Watt, trailing edge, 24°, matt black

The NUMINOS® M CL, PHASE is a cylindrical surface-mounted ceiling luminaire designed for indoor use. It features phase-cut dimming and delivers a luminous flux of 1800 lumens at a power consumption of 14 watts. The colour temperature is 3000 Kelvin, producing warm white light, and the beam angle is 24 degrees for focused light distribution. The housing is matt black and measures 8.5 cm in diameter and 18.5 cm in height. The luminaire has an IP20 protection rating, making it suitable for dry indoor environments. The declared service life is 50,000 hours.



Light source

2093861



Item no.	1004226
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Surface
Assembly details	Ceiling,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	78
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	14 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	78.0
Number of luminaires at LS C16A	78.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	24°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	18.5 cm
Diameter	8.5 cm
Net weight	0.69 kg

Accessories

1006168	NUMINOS® M, white front ring
1008145	NUMINOS® M, front ring, matt gold
1008141	NUMINOS® M, front ring, matt copper