



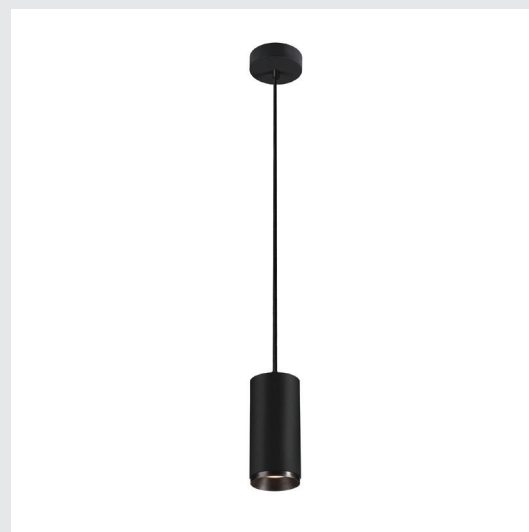

NUMINOS® M | PD, PHASE

NUMINOS® M PD, PHASE, Pendant light, pendant length 250 cm, 4000 K, 14 Watt, 36°, trailing edge, matt black

The NUMINOS® M PD PHASE is a pendant luminaire suitable for indoor use. It features a cylindrical shape and a pendant length of 250 cm, making it adaptable to various ceiling heights and application areas. The luminaire is equipped with LED technology, delivering a luminous flux of 1950 lumens at a colour temperature of 4000 K and a beam angle of 36°. Dimming is achieved via phase-cut control (Trailing Edge). The housing is made of aluminium and polycarbonate, ensuring a robust and durable construction. The luminaire has a diameter of 8.5 cm and a height of 18.5 cm. It has an IP20 rating, making it suitable for use in dry indoor environments. The canopy is designed in a ROUND shape.



Light source

2093757



Item no.	1004259
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	78
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	14 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	78.0
Number of luminaires at LS C16A	78.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	36°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	18.5 cm
Diameter	8.5 cm
Pendant length	250.0000 cm

Accessories

1006168	NUMINOS® M, white front ring
1008145	NUMINOS® M, front ring, matt gold
1008141	NUMINOS® M, front ring, matt copper