



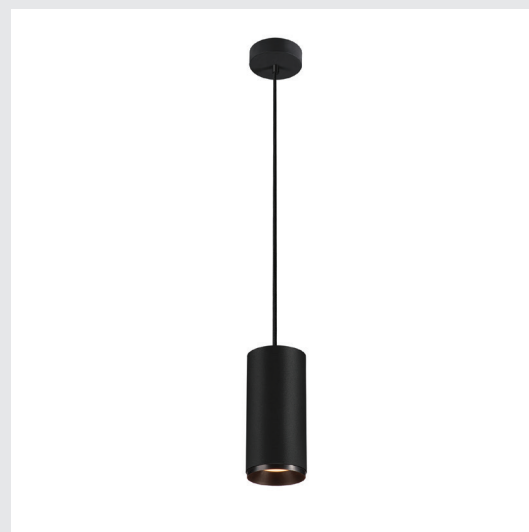

NUMINOS® L | PD, PHASE

NUMINOS® L PD, PHASE, Pendant light, pendant length 250 cm, 3000 K, 20 Watt, 24°, trailing edge, matt black

The NUMINOS® L PD, PHASE pendant luminaire is designed for indoor use and is particularly suitable for illuminating work and recreational areas. It features a cylindrical shape and a suspension length of 250 cm, allowing flexible installation at various ceiling heights. The luminaire is equipped with an LED light source that delivers a luminous flux of 2400 lumens at a colour temperature of 3000 K, with a beam angle of 24°. The power consumption is 20 watts. The housing is made of aluminium and polycarbonate, ensuring a robust and durable construction. The luminaire is equipped with phase-cut dimming and has an IP20 protection rating. The canopy is round in shape. The total height of the luminaire is 21.3 cm, with a diameter of 10 cm.



Light source

2093861



Item no.	1004346
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	78
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500 mA
Safety class	I
Wattage	20 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	78.0
Number of luminaires at LS C16A	78.0
Level of inrush current	10 A
Duration of inrush current	50 µs
Beam angle	24°
Color	black
CRI	90
UGR ≤	16
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	21.3 cm
Diameter	10 cm
Pendant length	250.0000 cm

Accessories

1006169	NUMINOS® L, white front ring
1008146	NUMINOS® L, front ring, matt gold
1008142	NUMINOS® L, front ring, matt copper