



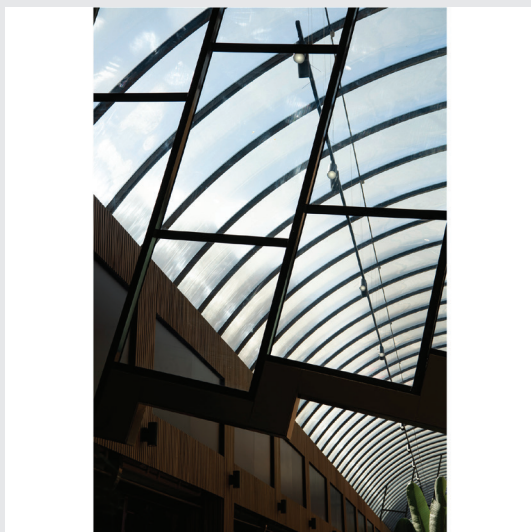

NUMINOS® L | 3Ph., DALI

NUMINOS® L 3Ph., DALI, 3~ Spotlight, cylindrical, 4000 K, 19 Watt, DALI, 60°, matt black

The NUMINOS® L 3Ph. DALI 3~ Spot is a cylindrical luminaire designed for mounting on ceiling track systems. It is particularly suitable for indoor use where directional lighting is required. With a luminous flux of 2600 lumens and a colour temperature of 4000 K, the spot provides neutral white illumination. The luminaire features a beam angle of 60° and a power consumption of 19 watts. The housing is made of aluminium with a matt black finish. Its dimensions are 21.3 cm in length, 10 cm in diameter, and 18 cm in height. Dimming is controlled via DALI 2 and touch control. The luminaire has an IP20 protection rating, making it suitable for indoor areas without direct exposure to moisture.



Light source

2093757



Item no.	1004572
Lamps included	No
Number of different light outlets	1
IP Code	IP20
Assembly	Track
Assembly details	Ceiling,
Dimmable	true
Dimming technology	DALI 2Touch
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500 mA
Safety class	I
Wattage	20 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	50°C
Number of luminaires at LS B16A	94.0
Number of luminaires at LS C16A	94.0
Level of inrush current	2.75 A
Duration of inrush current	190 µs
Beam angle	60°
Color	black
CRI	90
UGR ≤	19
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	21.3 cm
Height	18 cm
Diameter	10 cm
Net weight	1.14 kg

Accessories

1006169	NUMINOS® L, white front ring
1008146	NUMINOS® L, front ring, matt gold
1008142	NUMINOS® L, front ring, matt copper