



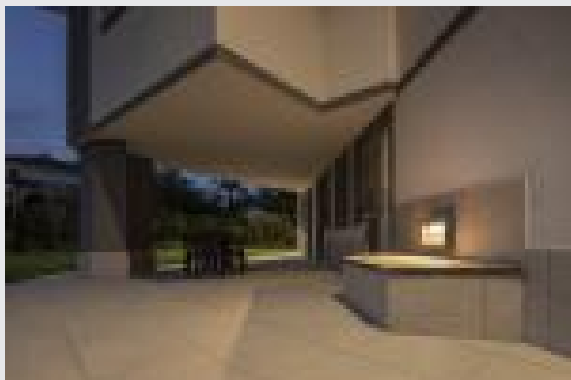

CONCRETO L

WL wall-mounted light grey, 12 W, 570 lm, 3000 K

A high-quality feature made from fashionable concrete: the rectangular CONCRETO L wall-mounted light adds a fresh touch to outdoor areas. With a colour temperature of 3000 Kelvin, the integrated LED bulb emits an inviting, warm white light with a particularly sustainable lifespan of 50,000 hours. The grey concrete lamp has an IP65 protection class rating that offers protection in any weather.



TECHNICAL DATA

Item no.	1006405
IP Code	IP65
Impact resistance class	IK 03
Impact resistance	0.35 Joule
Primary nominal voltage	220-240V ~50/60 Hz
Secondary power / voltage	700 mA
Safety class	II
Wattage	12 W
Minimum ambient temperature	-20 °C
Maximum ambient temperature	35 °C
Operating efficiency (LOR)	0.33
Number of luminaires at LS B16A	61
Number of luminaires at LS C16A	61
Level of inrush current	9 A
Duration of inrush current	150 µs
Temperature at glass (light emission)	40 °C
Lumen	470 lm
Colour temperature	3000 Kelvin
Color	gray/black
CRI	80
Service life	50000 h
Risk Group	0

Light Source

1319290		Width	37.5 cm
		Height	25 cm
		Depth	8 cm
		Net weight	5.617 kg
		Gross weight	6.933 kg
		BIG WHITE Page	855