



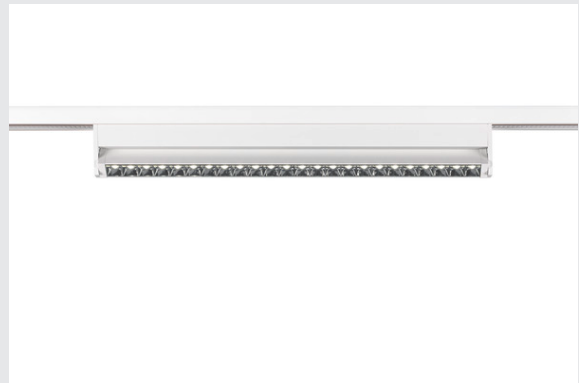

## IN-LINE 46

**48V Spot, Move, Darklight Reflector, DALI, white, 14W, 1250lm, 4000K, CRI90, 35°**

Simple linear lights for a particularly elegant look. The IN-LINE linear luminaires form a unit in the 48V track system that only brings out the best: High-quality light in various lumen levels, lengths and colour temperatures, now also in 4,000 K. To integrate ambient lighting into modern interior design, there is a choice between fixed and swivelling versions as well as opal optics or darklight reflectors, which ensure perfect glare control and create a pleasant room atmosphere.



### Tekniske data

|                           |                                |
|---------------------------|--------------------------------|
| Item no.                  | 1006650                        |
| Antal lysåbninger         | 1                              |
| IP klasse                 | IP20                           |
| IK Vandalklasse           | IK02                           |
| Slagfasthed               | 0.2 Joule                      |
| Monterings detaljer       | Track,Track Ceiling,Track Wall |
| Dæmpbar                   | Ja                             |
| Dæmpningstype             | DALI 2                         |
| Primær spænding           | 48V                            |
| Sekundær strøm / spænding | 350mA                          |
| IP Tæthedsggrad           | III                            |
| Watt                      | 14 W                           |
| Min omgivelsestemperatur  | -20 °C                         |
| Max omgivelsestemperatur  | 35 °C                          |
| Lumen                     | 1250 lm                        |
| Farvetemperatur           | 4000 Kelvin                    |
| Spredningsvinkel          | 35 °                           |
| Farve                     | matt white/white               |
| CRI                       | 90                             |
| UGR ≤                     | 16                             |
| LXXBXX-data               | L80B50                         |
| Længde                    | 45.5 cm                        |

Lyskilde

|  |                                                                                   |
|--|-----------------------------------------------------------------------------------|
|  |  |
|--|-----------------------------------------------------------------------------------|

|            |          |
|------------|----------|
| Bredde     | 2.2 cm   |
| Højde      | 5.8 cm   |
| Nettovægt  | 0.531 kg |
| Bruttovægt | 0.635 kg |