



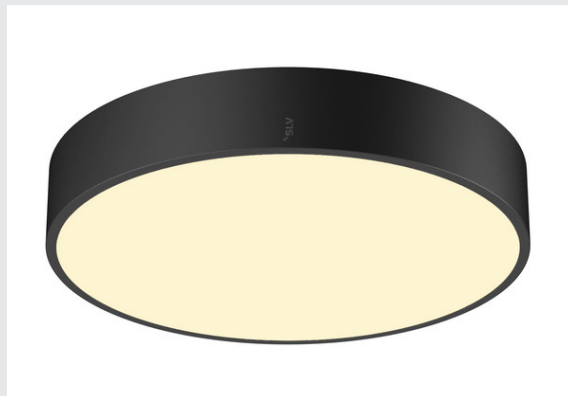

## MEDO® PRO 40

wall- and ceiling-mounted light, round, 3000/4000K, 19W, DALI, Touch, 110°, black

Our design classic MEDO® has a new high-output addition: the MEDO® PRO. It impresses with its service life of L80B10@50,000h, eligible energy efficiency from 120 lm/W and a higher indirect light component. Efficiency is also the order of the day when it comes to installation, which is particularly fast thanks to our EasyBase. The improved protection code IP50 and an outstanding CRI>90 colour reproduction index ensure exceptional quality. Two elegant casing colours and a CCT switch that enables you to choose between 3000 K and 4000 K lets you personalise your lighting situation. The MEDO® PRO is available as a DALI and phase version, additionally you have the choice between opal (UGR<25) and prismatic (UGR<19) glass. As your most demanding projects deserve only the best lighting.



### Tekniske data

|                                  |                                  |
|----------------------------------|----------------------------------|
| Item no.                         | 1007294                          |
| Antal lysåbninger                | 2                                |
| IP klasse                        | IP50                             |
| IK Vandalklasse                  | IK02                             |
| Slagfasthed                      | 0.2 Joule                        |
| Montering                        | Surface                          |
| Monterings detaljer              | Ceiling, Ceiling with Acc., Wall |
| Dæmpbar                          | Ja                               |
| Dæmpningstype                    | DALI, Touch                      |
| Antal lamper ved videresløjfning | 20                               |
| Primær spænding                  | 220-240V ~50/60Hz                |
| Sekundær strøm / spænding        | 500mA                            |
| IP Tæthedsgard                   | I                                |
| Watt                             | 19 W                             |
| Omgivelsestemperatur             | 25 °C                            |
| Min omgivelsestemperatur         | -20 °C                           |
| Max omgivelsestemperatur         | 30 °C                            |
| Lumen                            | 2650/2650 lm                     |
| Farvetemperatur                  | 3000/4000 Kelvin                 |
| Spredningsvinkel                 | 110 °                            |
| Farve                            | matt black                       |
| CRI                              | 90                               |

Lyskilde

|          |                                                                                   |
|----------|-----------------------------------------------------------------------------------|
| 1807453  |  |
| Tilbehør |                                                                                   |
| 1001952  | MEDO 5m suspension , black                                                        |
| 1001950  | MEDO 5m suspension , white                                                        |
| 135250   | SUSPENSION SET , for MEDO round pendant, round, black, 5-wire                     |
| 1001951  | MEDO 5m suspension , silver-grey                                                  |
| 135251   | SUSPENSION SET , for MEDO round pendant, round, white, 5-wire                     |
| 135254   | SUSPENSION SET , for MEDO round pendant, round, silver-grey, 5-wire               |

|                |          |
|----------------|----------|
| UGR ≤          | 25       |
| LXXBXX-data    | L80B10   |
| Højde          | 9.2 cm   |
| Diameter       | 38 cm    |
| Nettovægt      | 2.03 kg  |
| Bruttovægt     | 2.813 kg |
| BIG WHITE side | 152      |