



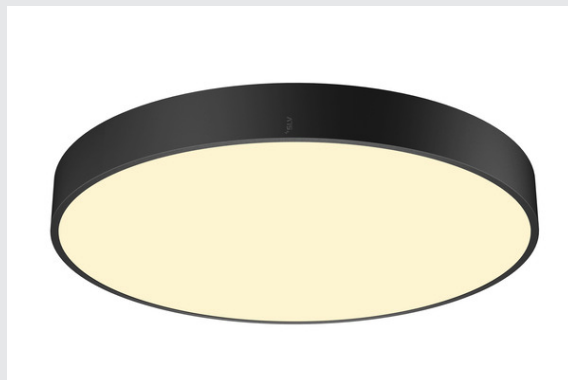

MEDO® 60

wall- and ceiling-mounted light, round,
2700/3000/4000K, 39W, trailing-edge phase, 110°,
black

The new MEDO® sets standards and impresses with a longer service life, better energy efficiency and a higher indirect light component. The improved protection code IP50 and an outstanding CRI>90 colour reproduction index ensure exceptional quality. Three elegant casing colours and a CCT switch that enables you to choose between 2700 K, 3000 K and 4000 K lets you personalise your lighting situation. And thanks to EasyBase, installation is as simple as it is fast.



Tekniske data

Item no.	1007322
Antal lysåbninger	2
IP klasse	IP50
IK Vandalklasse	IK02
Slagfasthed	0.2 Joule
Montering	Surface
Monterings detaljer	Ceiling,Ceiling with Acc.,Wall
Dæmpbar	Ja
Dæmpningstype	trailing edge
Antal lamper ved videresløjfning	20
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	1000mA
IP Tæthedsgard	I
Watt	39 W
Omgivelsestemperatur	25 °C
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	40 °C
Lumen	4050/4250/4550 lm
Farvetemperatur	2700/3000/4000 Kelvin
Spredningsvinkel	110 °
Farve	matt black
CRI	90

Lyskilde

1900645	
Tilbehør	
1001952	MEDO 5m suspension , black
1001950	MEDO 5m suspension , white
135250	SUSPENSION SET , for MEDO round pendant, round, black, 5-wire
1001951	MEDO 5m suspension , silver-grey
135251	SUSPENSION SET , for MEDO round pendant, round, white, 5-wire
135254	SUSPENSION SET , for MEDO round pendant, round, silver-grey, 5-wire

UGR ≤	22
LXXBXX-data	L70B50
Højde	9.2 cm
Diameter	60 cm
Nettovægt	5.143 kg
Bruttovægt	7.101 kg
BIG WHITE side	161