



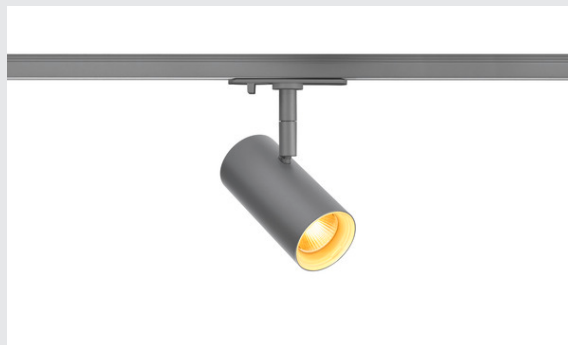

NOBLO® SPOT

1 ~ spot, round, 2000-3000K, 8.4 W, dim-to-warm, trailing-edge phase, 36°, grey

The rotating and pivoting NOBLO® SPOT shines across the board: quickly and easily mounted on the single-phase high-voltage track system, the new generation impresses with an improved colour reproduction index CRI>90, a lumen output of up to 126 lm/W and an increased service life of up to 50,000 hours. Added to this is the dim-to-warm technology (2000K - 3000K), which creates a variable lighting atmosphere in living areas, the hotel industry and gastronomy. Ideal for modern lighting concepts, made of high-quality aluminium and quickly installed – with the new NOBLO® SPOTS you are opting for a unique lighting experience.



Tekniske data

Item no.	1007354
IP klasse	IP20
Montering	Surface
Monterings detaljer	Ceiling, Track Ceiling, Track Wall
Dæmpbar	Ja
Dæmpningstype	Dim-to-Warm, trailing edge
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	350mA
IP Tæthedsggrad	I
Watt	8.4 W
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	30 °C
Lumen	30-450 lm
Farvetemperatur	2000-3000 Kelvin
Spredningsvinkel	36 °
Farve	matt gray
CRI	90
LXXBXX-data	L70B50
Længde	10.5 cm
Højde	10.7 cm
Diameter	5 cm
Nettovægt	0.255 kg

Lyskilde

916398	
--------	---

Tilbehør

1008484	NOBLO® , decorative ring, gold
1008487	NOBLO® , decorative ring, bronze
1008486	NOBLO® , decorative ring, copper
1008483	NOBLO® , decorative ring, white
1008482	NOBLO® , decorative ring, black
1008485	NOBLO® , decorative ring, grey

Bruttovægt	0.364 kg
BIG WHITE side	503