



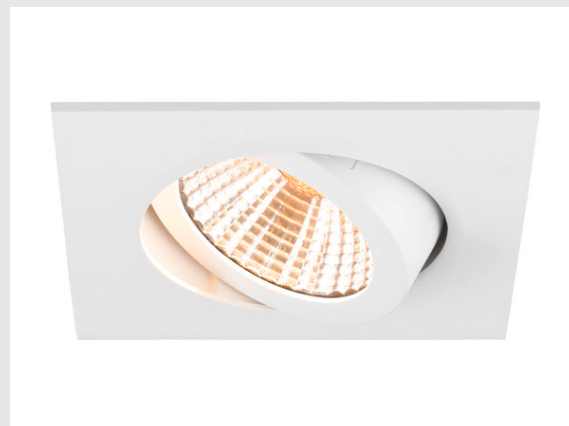

## NEW TRIA® 68

recessed ceiling light, 2700 K, 38°, IP 20, square, white

Discover the new generation of our NEW TRIA® recessed ceiling light with even more modularity for an individual lighting experience. Top sellers such as the NEW TRIA® 68 are also available as a complete set. The integrated LED MODULE, which is available with different light colours (2700 K/3000 K) and beam angles (38°/60°), provides lighting design options. The pivot range allows flexible alignment of the light. In black or white, the high-quality housing blends harmoniously into any room ambience. And thanks to the 68 mm mounting ring supplied, the downlights can also be installed quickly and simply.



## TECHNICAL DATA

|                                 |                            |
|---------------------------------|----------------------------|
| Item no.                        | 1007393                    |
| Rotating or tilting             | tiltable                   |
| IP Code                         | IP20                       |
| Dimmable                        | Yes                        |
| Dimming technology              | Leading edge,trailing edge |
| Primary nominal voltage         | 220-240V ~50/60 Hz         |
| Secondary power / voltage       | 200 mA                     |
| Safety class                    | II                         |
| Wattage                         | 8.3 W                      |
| Minimum ambient temperature     | -20 °C                     |
| Maximum ambient temperature     | 35 °C                      |
| Number of luminaires at LS B16A | 88                         |
| Number of luminaires at LS C16A | 149                        |
| Level of inrush current         | 3 A                        |
| Duration of inrush current      | 30 µs                      |
| Lumen                           | 705 lm                     |
| Colour temperature              | 2700 Kelvin                |
| Beam angle                      | 38 °                       |
| Color                           | white                      |
| CRI                             | 90                         |
| Service life                    | 50000 h                    |
| Risk Group                      | 1                          |

## Light Source

|                       |                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------|
| 869193                |  |
| Length                | 8.2 cm                                                                            |
| Width                 | 8.2 cm                                                                            |
| Height                | 4 cm                                                                              |
| Net weight            | 0.209 kg                                                                          |
| Gross weight          | 0.249 kg                                                                          |
| Shape of cut-out      | round                                                                             |
| Installation depth    | 4 cm                                                                              |
| Installation diameter | 6.8 cm                                                                            |
| BIG WHITE Page        | 105                                                                               |