



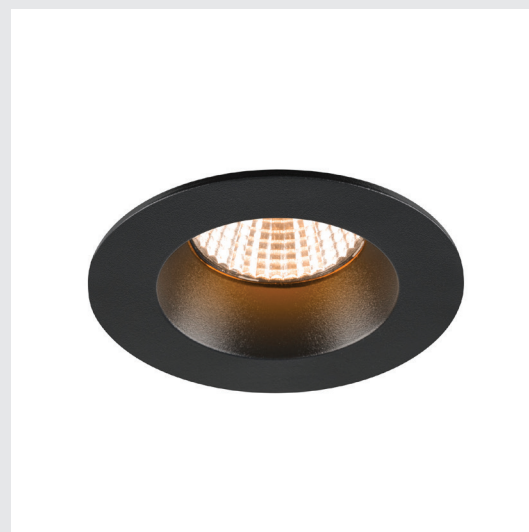

NEW TRIA® 68 | DL, round, PHASE

NEW TRIA® 68, recessed ceiling light, 2700 K, 38°, IP 20 / IP 65, round, black

Discover the new generation of our NEW TRIA® recessed ceiling light with even more modularity for an individual lighting experience. Top sellers such as the NEW TRIA® 68 are available as a complete set. The integrated LED MODULE, which is available with different light colours (2700 K/3000 K) and a beam angle of 38°, provides lighting design options. Thanks to protection class IP 65, the recessed spotlight is also the ideal choice for damp rooms. In black or white, the round housing blends harmoniously into any room ambience. And thanks to the 68 mm mounting ring supplied, the downlights can also be installed quickly and simply.



Light source

869193



Item no.	1007406
Lamps included	No
IP Code	IP20/IP65
Impact resistance class	IK02
Impact resistance	0.2 Joule
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	Leading edgetrailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	II
Wattage	8 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	35°C
Number of luminaires at LS B16A	88.0
Number of luminaires at LS C16A	149.0
Level of inrush current	3 A
Duration of inrush current	30 µs
Beam angle	38°
Color	black
CRI	90
LXXBXX data	L80B10
Service life	50 000 h
Height	5.9 cm
Diameter	8.2 cm
Net weight	0.24 kg
Gross weight	0.28 kg
Shape of cut-out	round