



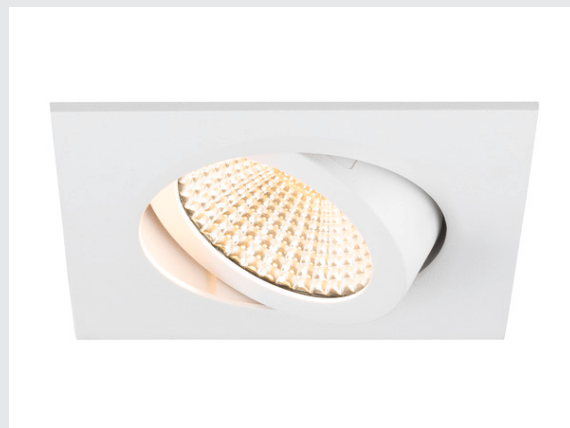

NEW TRIA® UNIVERSAL 68

recessed ceiling light, 2500/3000/4000K, 60°, IP 20, square, white

Discover the new generation of our NEW TRIA® recessed ceiling light with even more modularity for an individual lighting experience. Top sellers such as the NEW TRIA® UNIVERSAL 68 are available as a complete set. Lighting design options are provided by the integrated multi-wattage LED MODULE, which is variable in terms of output and light intensity and available with different beam angles (38°/60°). While the CCT switch allows easy selection between 2500K, 3000K and 4000K, the pivot range ensures flexible alignment of the light. In black or white, the high-quality housing blends harmoniously into any room ambience. And thanks to the 68mm mounting ring supplied, the downlights can also be installed quickly and simply.



Tekniske data

Item no.	1007439
IP klasse	IP20
Montering	Recessed
Monterings detaljer	Ceiling
Dæmpbar	Ja
Dæmpningstype	Leading edge, trailing edge
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	100-180mA
IP Tæthedsgard	II
Watt	8.6 W
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	35 °C
Lumen	540/600/600 lm
Farvetemperatur	2500/3000/4000 Kelvin
Spredningsvinkel	60 °
Farve	matt white
CRI	90
LXXBXX-data	L80B10
Længde	8.2 cm
Bredde	8.2 cm
Højde	3.4 cm
Nettovægt	0.216 kg

Lyskilde

1807470	
---------	---

Bruttovægt	0.261 kg
Indbygningsdybde	4 cm
Installations diameter	6.8 cm
BIG WHITE side	137