



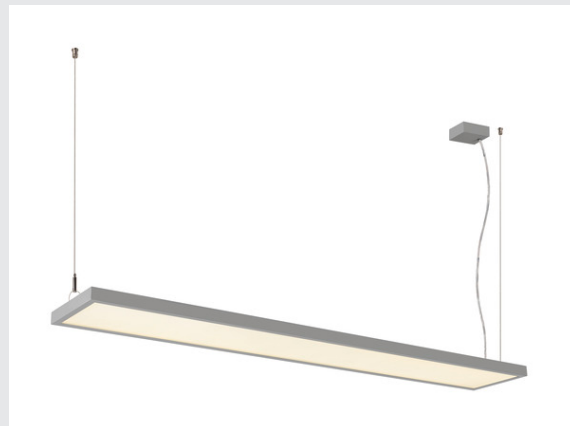

WORKLIGHT PRO 150

pendant light, 150cm, 4000K, DALI, Touch, grey

The new WORKLIGHT PRO stands for high performance in the workplace: the DALI-controllable pendant light is optimally designed in line with the latest DIN EN 12464:2021 standard. Its glare-free ($UGR < 19$) luminous efficiency of 127 lm/W, a colour temperature of 4000K and improved, indirect light output offers everything you need for an ergonomic working environment. Dimmability and a long life-span of 50,000 hours also help to make the office pendant light what it is: a true SLV colleague that assists with productivity.



Tekniske data

Item no.	1007473
Antal lysåbninger	2
IP klasse	IP20
IK Vandalklasse	IK03
Slagfasthed	0.35 Joule
Montering	Surface
Monterings detaljer	Ceiling
Dæmpbar	Ja
Dæmpningstype	DALI,Touch
Primær spænding	200-240V ~50/60Hz
Sekundær strøm / spænding	1400mA
IP Tæthedsgard	I
Watt	59 W
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	45 °C
Lumen	7200 lm
Farvetemperatur	4000 Kelvin
Spredningsvinkel	80 °
Farve	matt gray
CRI	80
UGR ≤	19
LXXBXX-data	L80B10

Lyskilde

1807477	A ↑ G E
1807478	A ↑ G D

Længde	150 cm
Højde	24 cm
Dybde	3.28 cm
Pendellængde	250 cm
Nettovægt	6.457 kg
Bruttovægt	9.294 kg
BIG WHITE side	287