



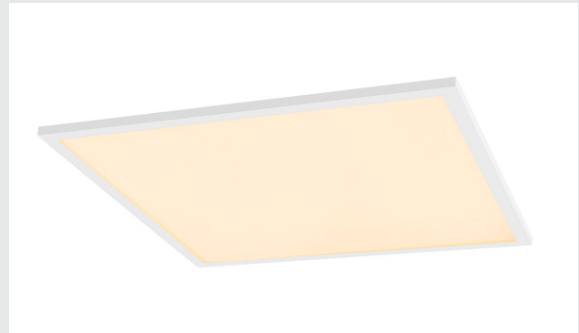

PANEL V DALI 600

34W 830/840 UGR

Discover our new technical product range: SLVtec. With state-of-the-art LED technology, we offer energy-efficient and functional lighting solutions for indoor and outdoor use. From wet room lights to high-bay spotlights – our high-quality products impress with functionality and a fair price-performance ratio. These include the PANEL V light, which is available as a surface-mounted, recessed and DALI version. The light colour (3000K/4000K) and light intensity (4100lm/4350lm) can be easily changed via dip switches. Thanks to the high light output of up to 120 lm/W and the UGR<19, the lights are particularly suitable for office spaces where glare-free and homogeneous illumination is important. For this purpose, the external driver enables easy installation. Decide in favour of SLVtec today.



Tekniske data

Item no.	1007504
IP klasse	IP40/IP54
Slagfasthed	0.35 Joule
Montering	Recessed
Monterings detaljer	Ceiling, Ceiling with Acc.
Dæmpbar	Ja
Dæmpningstype	DALI
Primær spænding	200-240V ~50/60Hz
Sekundær strøm / spænding	900mA
IP Tæthedsgad	II
Watt	34 W
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	40 °C
Lumen	4000/4200 lm
Farvetemperatur	3000/4000 Kelvin
Spredningsvinkel	85 °
Farve	matt white
CRI	80
UGR ≤	19
LXXBXX-data	L80B10
Længde	59.5 cm
Bredde	59.5 cm

Lyskilde

1807491	
---------	---

Tilbehør

1007577	PANEL V , safety rope 1500mm
1007474	PANEL 600 , assembly mounting frame
1007575	PANEL 600 , recessed mounting frame

Højde	2.8 cm
Nettovægt	1.823 kg
Bruttovægt	2.38 kg
Indbygnings længde	58.5 cm
Indbygningsbredde	58.5 cm
Indbygningsdybde	8 cm