



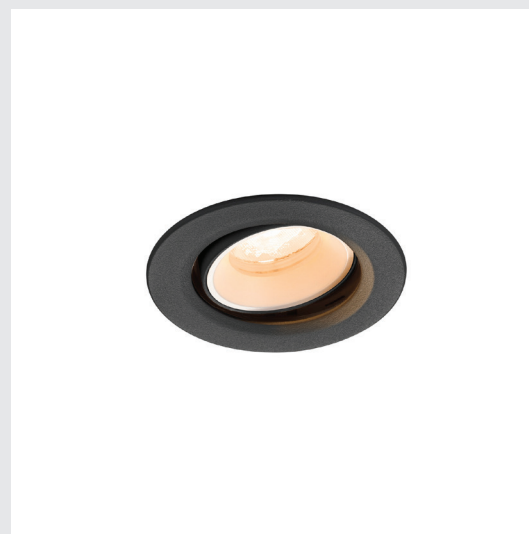

NUMINOS® MOVE XS | DL

NUMINOS® MOVE XS, Recessed ceiling light, 2700 K, 40°, IP20, round, black / white

The NUMINOS light system from SLV combines technology, design and functionality like no other. With various downlights and spotlights, you provide a thousand lighting design options. This also includes NUMINOS® MOVE XS, which impresses as a recessed ceiling light with the best workmanship and lighting quality. Ideal for harmonious, modern and space-saving lighting that directs the accent to objects or the room. Installation is then done in no time at all. When do you choose NUMINOS ® from SLV?



Light source

2093755



Item no.	1009329
Lamps included	No
Number of different light outlets	1
Rotating or tilting	rotary bar and tiltable
IP Code	IP20
Assembly	Recessed
Assembly details	Ceiling,
Secondary power / voltage	200 mA
Safety class	III
Wattage	7 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Beam angle	40°
Color	black/white
CRI	90
UGR ≤	22
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	5.3 cm
Diameter	8 cm
Net weight	0.11 kg
Gross weight	0.22 kg
Shape of cut-out	round
Installation depth	8 cm
Installation diameter	6.8 cm

Accessories

1010695	LED driver, 21W, 200 mA, DALI
1010699	LED driver, 10W, 200 mA, PHASE
1010703	LED driver, 23W, 200 mA, DALI
1010125	NUMINOS® XS, reflector, gold
1010126	NUMINOS® XS, reflector, copper
1005612	NUMINOS® XS, diffuser
1005613	NUMINOS® XS, transparent diffuser
1005614	NUMINOS® XS, frosted diffuser
1005615	NUMINOS® XS, black diffuser
1006135	Numinos® XS Reducing ring, round 160/70 mm black
1006136	Numinos® XS Reducing ring, round 160/70 mm white
1006137	Numinos® XS Reducing ring, square 160/70 mm black
1006138	Numinos® XS Reducing ring, square 160/70 mm white