



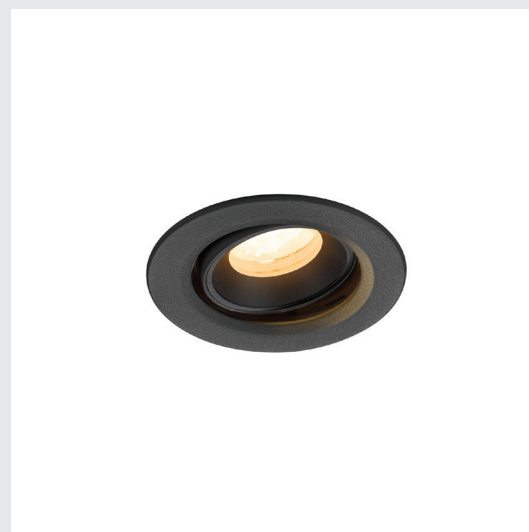

NUMINOS® MOVE XS | DL

NUMINOS® MOVE XS, Recessed ceiling light, 4000 K, 40°, IP20, round, black

The NUMINOS light system from SLV combines technology, design and functionality like no other. With a variety of downlights and spotlights, you provide a thousand lighting design options. Also with the NUMINOS® MOVE XS recessed ceiling light, which convinces with the best workmanship and lighting quality. Ideal for discreet, modern and space-saving lighting that draws the focus to objects or the room. Installation is then done in no time at all. When will you choose SLV's modular variety?



Light source

2093754



Item no.	1009364
Lamps included	No
Number of different light outlets	1
Rotating or tilting	rotary bar and tiltable
IP Code	IP20
Assembly	Recessed
Assembly details	Ceiling,
Secondary power / voltage	200 mA
Safety class	III
Wattage	7 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Beam angle	40°
Color	black
CRI	90
UGR ≤	22
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Height	5.3 cm
Diameter	8 cm
Net weight	0.11 kg
Gross weight	0.22 kg
Shape of cut-out	round
Installation depth	8 cm
Installation diameter	6.8 cm
BIG WHITE Page	29

Accessories

1010695	LED driver, 21W, 200 mA, DALI
1010699	LED driver, 10W, 200 mA, PHASE
1010703	LED driver, 23W, 200 mA, DALI
1010125	NUMINOS® XS, reflector, gold
1010126	NUMINOS® XS, reflector, copper
1005612	NUMINOS® XS, diffuser
1005613	NUMINOS® XS, transparent diffuser
1005614	NUMINOS® XS, frosted diffuser
1005615	NUMINOS® XS, black diffuser
1006135	Numinos® XS Reducing ring, round 160/70 mm black
1006136	Numinos® XS Reducing ring, round 160/70 mm white
1006137	Numinos® XS Reducing ring, square 160/70 mm black
1006138	Numinos® XS Reducing ring, square 160/70 mm white