



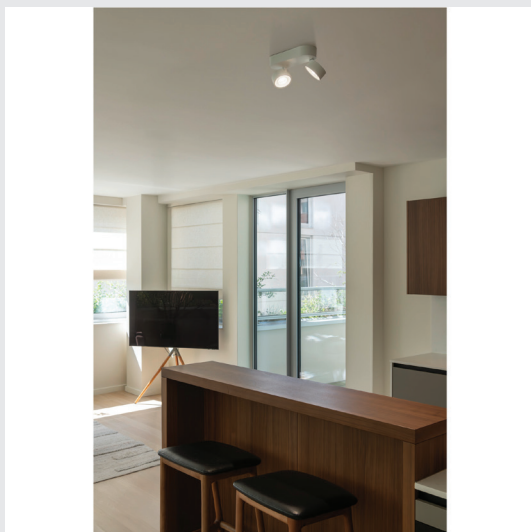

KALU 2.0 | CW, PHASE

KALU 2.0, Wall and ceiling-mounted light, PHASE, 3000 K, 19W, 36°, white

KALU 2.0 presents the decorative lighting classic in a new look. The clear design with interchangeable front rings and four lens options (15°, 24°, 36°, 60°) offers maximum flexibility in lighting design. With an efficiency of over 140 lm/W, a low UGR <19, modern colour combinations and precise LED technology, KALU 2.0 fits perfectly into living spaces, restaurants and modern offices.



Light source

2093784	
---------	---

Item no.	1010269
Lamps included	No
Number of different light outlets	2
IP Code	IP20
Impact resistance class	IK02
Impact resistance	0.2 Joule
Assembly	Surface
Assembly details	Ceiling, Wall,
Dimmable	true
Dimming technology	trailing edge
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500 mA
Safety class	I
Wattage	19 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	69.0
Number of luminaires at LS C16A	110.0
Level of inrush current	14 A
Duration of inrush current	10 µs
Beam angle	36°
Color	white
CRI	90
UGR ≤	19
LXXBXX data	L90B10
Service life	50 000 h
Risk Group	1
Length	26.3 cm
Width	9.2 cm

Accessories

1010135	KALU 2.0, decorative ring, white
1010136	KALU 2.0, decorative ring, black
1010138	KALU 2.0, decorative ring, gold
1010139	KALU 2.0, decorative ring, copper
1010140	KALU 2.0, lens, 15°
1010141	KALU 2.0, lens, 24°
1010142	KALU 2.0, lens, 36°
1010143	KALU 2.0, lens, 60°