



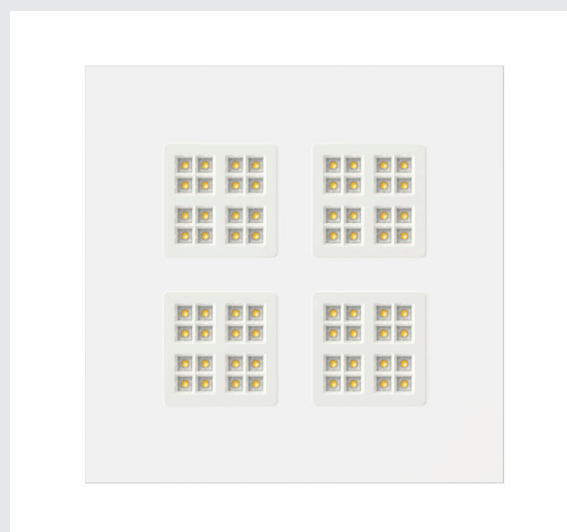

PAVANNO

600 45 830/840/850 WB WH UGR19

PAVANNO: energy-efficient, durable, eligible for subsidies. With up to 190 lm/W, 100,000 h service life, UGR<19, multi-lumen/colour and DALI control, the luminaire is perfect for working environments such as offices, training rooms or healthcare facilities.



TECHNICAL DATA

Item no.	1010713
IP Code	IP20
Impact resistance class	IK 02
Assembly	Recessed
Assembly details	Ceiling
Primary nominal voltage	220-240V ~0/50/60 Hz
Secondary power / voltage	500-1100 mA
Safety class	II
Wattage	17 W
Ambient temperature	80 °C
Minimum ambient temperature	-20 °C
Maximum ambient temperature	40 °C
Number of luminaires at LS B16A	27
Number of luminaires at LS C16A	45
Level of inrush current	19.1 A
Duration of inrush current	220 µs
Lumen	2957 / 6882 lm
Colour temperature	3000/4000/5000 Kelvin
Beam angle	80 °
Color	white
CRI	80
UGR ≤	19

Light Source

	
--	---

Service life	100000 h
Risk Group	1
Length	60 cm
Width	60 cm
Height	2 cm
Net weight	3 kg
Gross weight	3.4 kg