



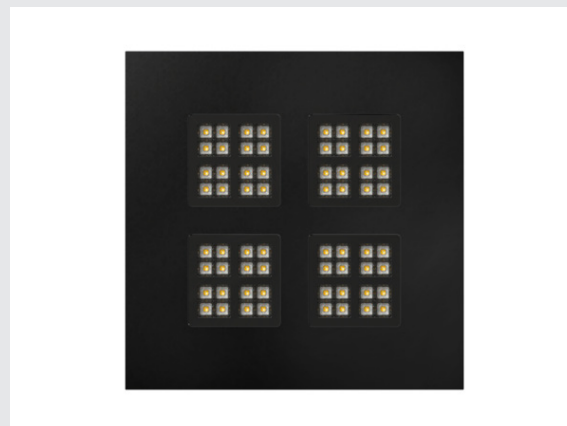

PAVANNO

600 45 830/840/850 WB BK UGR19 DALI

PAVANNO: energy-efficient, durable, eligible for subsidies. With up to 190 lm/W, 100,000 h service life, UGR<19, multi-lumen/colour and DALI control, the luminaire is perfect for working environments such as offices, training rooms or healthcare facilities.



TECHNICAL DATA

Item no.	1010715
IP Code	IP20
Impact resistance class	IK 02
Assembly	Recessed
Assembly details	Ceiling
Dimmable	Yes
Dimming technology	DALI
Primary nominal voltage	220-240V ~0/50/60 Hz
Secondary power / voltage	600-1050 mA
Safety class	II
Wattage	22 W
Ambient temperature	80 °C
Minimum ambient temperature	-20 °C
Maximum ambient temperature	40 °C
Lumen	3403 / 6238 lm
Colour temperature	3000/4000/5000 Kelvin
Beam angle	80 °
Color	black
CRI	80
UGR ≤	19
Service life	100000 h
Risk Group	1

Light Source

	
--	---

Length	60 cm
Width	60 cm
Height	2 cm
Net weight	3 kg
Gross weight	3.4 kg