



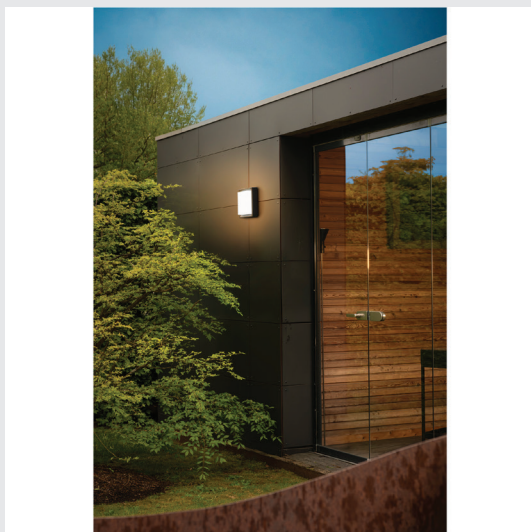

AINOS SLIDE | WL, SQUARE, PHASE

AINOS SLIDE WL, Wall surface-mounted luminaire, square, PHASE, 2700/3000 K, 11 W, IP65, black

The AINOS SLIDE WL is a square surface-mounted wall light suitable for use in indoor and outdoor areas where robust and weather-protected lighting is required. With a power consumption of 11 watts and a colour temperature of 2700/3000 K, it provides a pleasant light quality with a luminous flux of approximately 900/950 lumens. The housing is made of aluminium and equipped with a polycarbonate element, ensuring a durable construction. The luminaire has an IP65 rating for protection against dust and water ingress and features an impact resistance class of IK08. Dimming is possible via PHASE cut-on and cut-off control, allowing flexible adjustment of light intensity. With dimensions of 22.3 x 22.3 x 7.1 cm, the luminaire is compact and easy to install.



Item no.	1011260
Lamps included	No
IP Code	IP65
Impact resistance class	IK08
Impact resistance	5 Joule
Assembly	Surface
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	Leading edgetrailing edge
Number of through-wires	20
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	11 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	160.0
Number of luminaires at LS C16A	160.0
Level of inrush current	5 A
Duration of inrush current	100 µs
Color	black
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Width	22.3 cm
Height	22.3 cm
Depth	7.1
Net weight	1.49 kg