



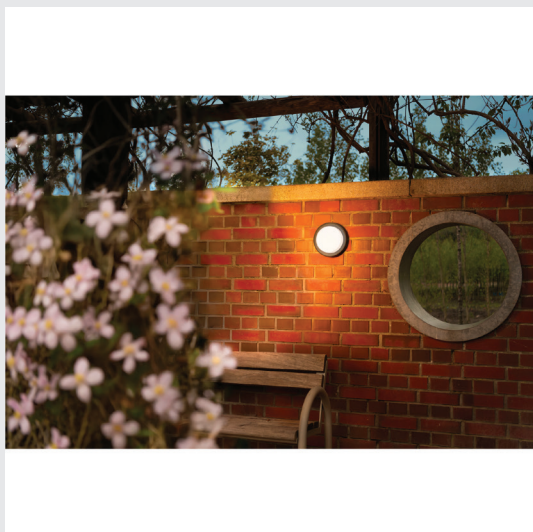

AINOS SLIDE | WL, ROUND, PHASE

AINOS SLIDE WL, surface-mounted wall luminaire, round, PHASE, 2700/3000 K, 11 W, IP65, black

The AINOS SLIDE WL is a ROUND surface-mounted wall light suitable for use in indoor and outdoor areas with increased requirements for protection and robustness. It has a power output of 11 watts and offers a colour temperature range from 2700 to 3000 Kelvin with a luminous flux of approximately 850 to 900 lumens. The luminaire can be controlled via leading-edge and trailing-edge dimming, allowing flexible light regulation. The housing is made of aluminium and polycarbonate, ensuring a robust construction. With a diameter of 22.3 cm and a height of 7.3 cm, the luminaire is designed to be compact. The IP65 rating provides protection against dust and jet water, while the IK08 impact resistance rating ensures protection against mechanical impacts.



Item no.	1011261
Lamps included	No
IP Code	IP65
Impact resistance class	IK08
Impact resistance	5 Joule
Assembly	Surface
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	Leading edgedtrailing edge
Number of through-wires	20
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	350 mA
Safety class	I
Wattage	11 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	160.0
Number of luminaires at LS C16A	160.0
Level of inrush current	5 A
Duration of inrush current	100 µs
Color	black
CRI	80
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Height	7.3 cm
Diameter	22.3 cm
Net weight	1.17 kg
Gross weight	1.41 kg