
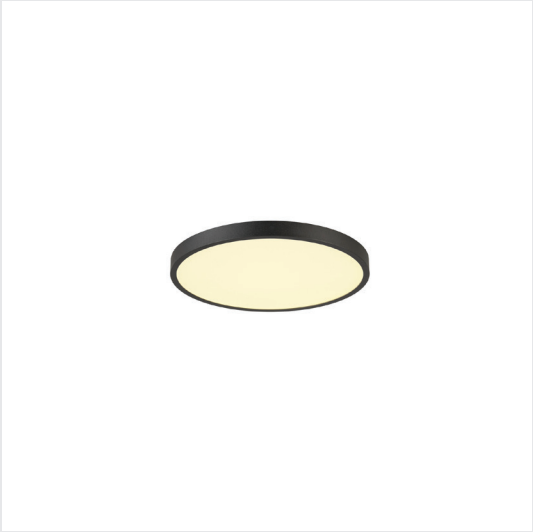


MEDO 2 SLIM 40 | CL, PHASE

MEDO 2 SLIM 40, CL, PHASE, Ceiling Surface-Mounted Luminaire, 3000/4000 K, 15.5 W, 85°, black

The MEDO 2 SLIM 40 is a surface-mounted ceiling luminaire designed for indoor use. It provides a luminous flux of 1900 lumens and operates at a colour temperature of 3000 or 4000 Kelvin. The luminaire features PHASE-cut dimming, allowing for stepless brightness adjustment. Its housing is made of aluminium and steel, ensuring a robust construction. With a diameter of 38 centimetres and a height of 4.9 centimetres, the luminaire is compact in size. The light distribution has a beam angle of 85 degrees. The IP20 protection rating and IK03 impact resistance make the luminaire suitable for typical indoor environments.



Item no.	1011695
IP Code	IP20
Impact resistance class	IK03
Assembly	Surface
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	40
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	400 mA
Safety class	I
Wattage	16 W
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	56.0
Number of luminaires at LS C16A	118.0
Level of inrush current	5 A
Duration of inrush current	300 µs
Beam angle	85°
Color	black
CRI	90
UGR ≤	19
LXXBXX data	L80B10
Service life	100 000 h
Risk Group	0
Height	4.9 cm
Diameter	38 cm
Net weight	3.3 kg
Gross weight	4.2 kg
BIG WHITE Page	199

Accessories

1011779	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, black
1011780	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, white
1011781	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, black
1011782	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, white
1011783	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, black
1011784	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, white