
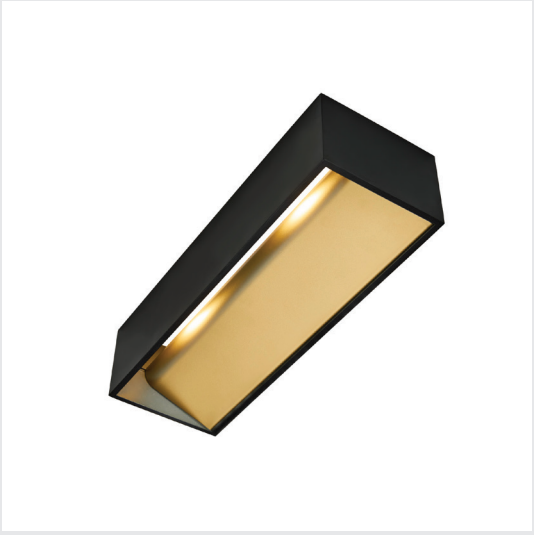


LOGS IN L | WL, DALI

LOGS IN L, Wall-Mounted Luminaire, DALI, 3000 K, 20 W, black / gold-coloured

The LOGS IN L wall-mounted luminaire is suitable for installation on interior walls and is designed for use in residential and commercial spaces. It delivers a luminous flux of 1400 lumens at a colour temperature of 3000 K with a power consumption of 20 watts. The luminaire features DALI-2 and touch dimming functions, allowing flexible light control. The housing is made of aluminium and steel, measuring 30 cm in length, 7 cm in height, and 10 cm in depth. Protection class IP20 and impact resistance IK class 02 provide basic protection against contact and minor mechanical impacts. The luminaire has a declared service life of 50,000 hours.



Light source

2336922	A G E

Item no.	1011865
Lamps included	No
IP Code	IP20
Impact resistance class	IK02
Impact resistance	0.2 Joule
Assembly	Surface
Assembly details	Wall,
Dimmable	true
Dimming technology	DALI 2Touch
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	500 mA
Safety class	I
Wattage	20 W
Ambient temperature	63
Minimum ambient temperature	0°C
Maximum ambient temperature	35°C
Number of luminaires at LS B16A	21.0
Number of luminaires at LS C16A	34.0
Level of inrush current	45 A
Duration of inrush current	16 µs
Color	black/gold
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Length	30 cm
Height	7 cm
Depth	10
Net weight	1.39 kg
Gross weight	1.6 kg