



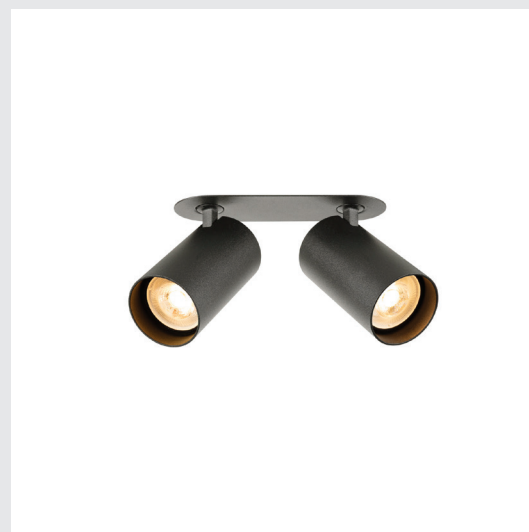

ENOLA 2.0 M | RL, DOUBLE, GU10, QPAR51

ENOLA 2.0 M, RL, DOUBLE, QPAR51, recessed ceiling luminaire, 2 x 10 W, black

The ENOLA 2.0 M is a recessed ceiling luminaire specifically designed for installation in ceilings. It is suitable for indoor use, for example in office or retail areas where directional lighting is required. The luminaire features two QPAR51 sockets, each with a power rating of 10 watts. The housing is made of aluminium and steel, combined with a polycarbonate component. The cut-out shape is designed as a racing track. With compact dimensions of 16.5 cm length, 11.8 cm width, and 6.6 cm height, it can be integrated discreetly. The IP20 protection rating provides protection against solid foreign objects larger than 12.5 mm but does not offer protection against moisture. The impact resistance is classified as IK02. Installation is carried out as a recessed ceiling luminaire.



Item no.	1011901
Socket	GU10
Number of sockets	2
Tilt range	90°
Horizontal rotation range	340°
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Number of through-wires	50
Primary nominal voltage	220-240V ~ 50/60Hz
Safety class	II
Wattage	10 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Color	black/black
Length	16.5 cm
Width	11.8 cm
Height	6.6 cm
Net weight	0.43 kg
Gross weight	0.6 kg
Shape of cut-out	racetrack
Installation length	15.5 cm
Installation depth	6 cm
Installation diameter	4.5 cm
BIG WHITE Page	109

Recommended light bulbs

1005077	LED lightbulb QPAR51, GU10, 2700 K, black
1012469	LED PAR16 Smart, GU10, Tunable White, Zigbee

Accessories

1011749	ENOLA 2.0/BIMA 2.0 M, Decorative ring, Ø 54 mm, black
1011750	ENOLA 2.0/BIMA 2.0 M, decorative ring, Ø 54 mm, white
1011751	ENOLA 2.0/BIMA 2.0 M, decorative ring, Ø 54 mm, gold
1011752	ENOLA 2.0/BIMA 2.0 M, decorative ring, Ø 54 mm, copper