
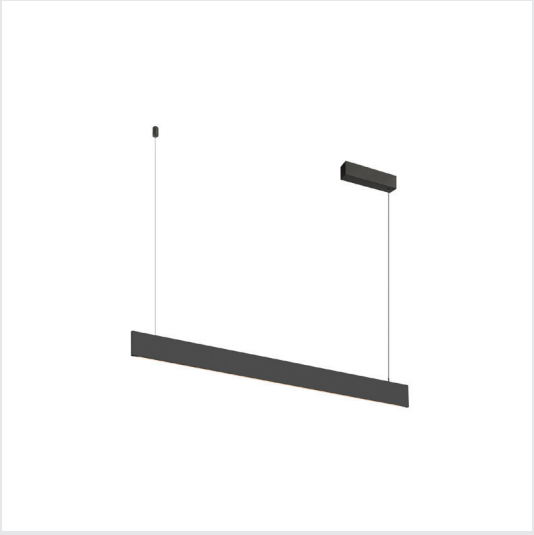


LINIUS 120 | PD, PHASE, CANOPY

LINIUS 120, PD, PHASE, CEILING ROSE, pendant luminaire, 2700 K, 34 W, 90°, black

The LINIUS 120 pendant light is designed for indoor use and is particularly suitable for ceiling mounting in residential and work areas. It has a power output of 34 watts and a colour temperature of 2700 Kelvin, producing a pleasant, warm white light. With a beam angle of 90°, it provides targeted illumination. The luminaire is equipped with phase-cut dimming, allowing for stepless brightness adjustment. The housing is made of aluminium and steel and comes in a black finish. The rectangular ceiling rose complements the slim design. The pendant length is 200 cm, with the luminaire measuring 121 cm in length, 7.9 cm in height, and 0.76 cm in width. The IP20 protection rating and IK02 impact resistance ensure safe operation indoors. The declared service life is 50,000 hours.



Item no.	1011934
Lamps included	No
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	I
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	64.0
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm