
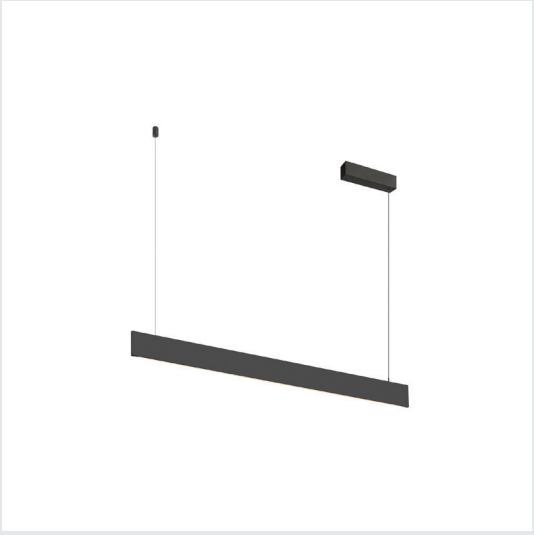


# LINIUS 120 | PD, PHASE, CANOPY

**LINIUS 120, PD, PHASE, CEILING ROSE, pendant luminaire, 3000 K, 34 W, 90°, black**

The LINIUS 120 pendant luminaire is designed for indoor use and is particularly suitable for offices, conference rooms, or representative areas. It features a luminous flux of 3100 lumens with a colour temperature of 3000 K and a beam angle of 90°. The luminaire is equipped with PHASE-cut dimming, allowing flexible light control. The housing is made of aluminium and steel and is fitted with a rectangular canopy. With a length of 121 cm and a suspension length of 200 cm, it offers an elegant and functional lighting solution. The IP20 protection rating and IK02 impact resistance ensure a robust design for indoor applications.




| | |
|---|---|
| **Item no.** | 1011936 |
| **IP Code** | IP20 |
| **Impact resistance class** | IK02 |
| **Assembly** | Surface |
| **Assembly details** | Ceiling suspended, |
| **Dimmable** | true |
| **Dimming technology** | trailing edge |
| **Number of through-wires** | 64 |
| **Primary nominal voltage** | 220-240V ~ 0/50/60Hz |
| **Secondary power / voltage** | 900 |
| **Safety class** | I |
| **Wattage** | 34 W |
| **Minimum ambient temperature** | 0°C |
| **Maximum ambient temperature** | 45°C |
| **Number of luminaires at LS B16A** | 64.0 |
| **Number of luminaires at LS C16A** | 128.0 |
| **Level of inrush current** | 15 A |
| **Duration of inrush current** | 10 µs |
| **Beam angle** | 90° |
| **Color** | black |
| **CRI** | 90 |
| **LXXBXX data** | L80B20 |
| **Service life** | 50 000 h |
| **Risk Group** | 0 |
| **Length** | 121 cm |
| **Width** | 0.8 cm |
| **Height** | 7.9 cm |
| **Pendant length** | 200.0000 cm |
| **Net weight** | 2.65 kg |