
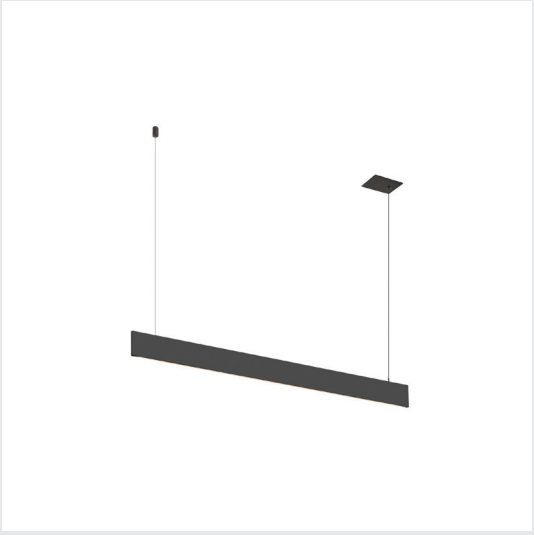


LINIUS 120 | PD, PHASE, RECESSED

LINIUS 120, PD, PHASE, RECESSED, pendant luminaire, 2700 K, 34 W, 90°, black

The pendant luminaire LINIUS 120 is designed for ceiling installation and is suitable for indoor use, for example in offices or public buildings. It has a luminous flux of 3000 lumens with a colour temperature of 2700 K and a beam angle of 90°. The luminaire is equipped with phase-cut dimming, allowing flexible light control. The housing is made of aluminium and steel, with a black finish. The luminaire measures 121 cm in length, 0.76 cm in width, and 7.9 cm in height, with a suspension length of 200 cm. The rectangular canopy and ROUND cut-out support the installation. The protection rating is IP20, and the impact resistance corresponds to IK02. The declared service life is 50,000 hours.



Item no.	1011938
Lamps included	No
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	II
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	64.0
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm