
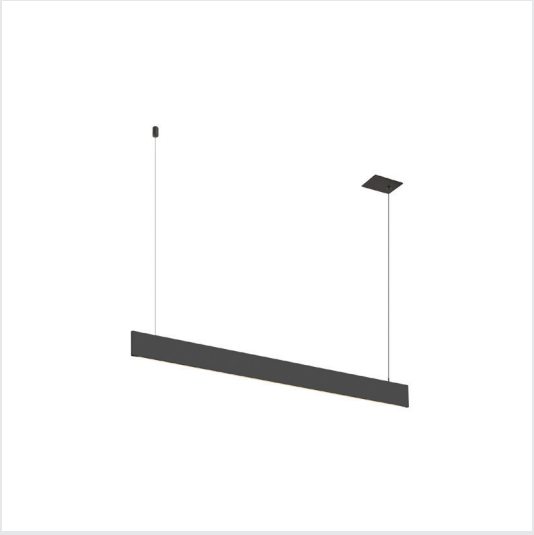


LINIUS 120 | PD, PHASE, RECESSED

LINIUS 120, PD, PHASE, RECESSED, pendant luminaire, 3000 K, 34 W, 90°, black

The pendant light LINIUS 120 is designed for ceiling installation and is suitable for indoor use, for example in offices or public areas. It provides a luminous flux of 3100 lumens with a colour temperature of 3000 K and a beam angle of 90°. The luminaire is equipped with phase-cut dimming, allowing flexible light control. The housing is made of aluminium and steel, while the canopy is rectangular and the cut-out is round. With a length of 121 cm, a width of 0.76 cm, and a height of 7.9 cm, it offers a slim design. The pendant length is 200 cm. The IP20 protection rating and impact resistance according to IK02 ensure safe operation in protected indoor areas. The luminaire is designed for a service life of 50,000 hours.



Item no.	1011940
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	II
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	64.0
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2 kg