
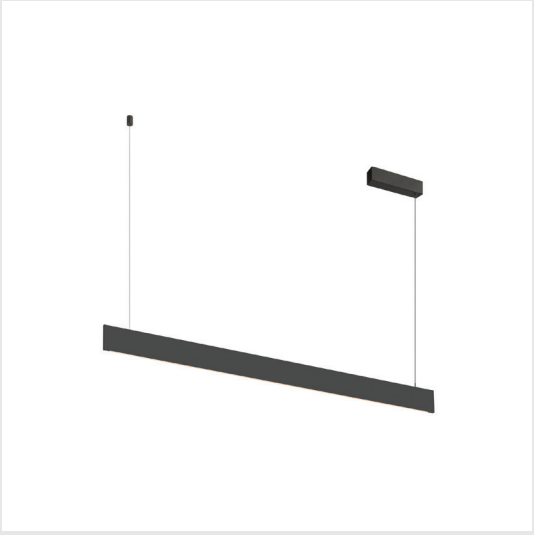


LINIUS 150 | PD, PHASE, CANOPY

LINIUS 150, PD, PHASE, CEILING ROSE, pendant luminaire, 2700 K, 40 W, 90°, black

The LINIUS 150 pendant light is designed for indoor use and is particularly suitable for ceiling mounting above tables or in open areas. It provides a luminous flux of 3350 lumens at a colour temperature of 2700 K and a beam angle of 90°. The luminaire features phase-cut dimming, allowing for stepless light control. The housing is made of aluminium and steel and is finished in black. The rectangular ceiling rose supports installation, while the pendant length of 200 cm offers flexible mounting options. The luminaire has an IP20 rating and an impact resistance class of IK02, making it suitable for protection against mechanical impacts indoors. The compact installation height is 7.9 cm, with a length of 150 cm and a width of 0.76 cm.



Item no.	1011942
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	1050
Safety class	I
Wattage	40 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	64.0
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	150 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.95 kg