
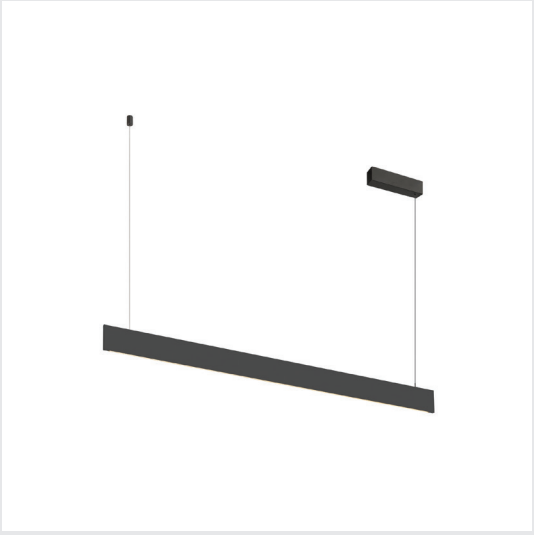


LINIUS 150 | PD, PHASE, CANOPY

LINIUS 150, PD, PHASE, CEILING ROSE, pendant luminaire, 3000 K, 40 W, 90°, black

The pendant luminaire LINIUS 150 is designed for indoor use and is particularly suitable for rooms with standard ceiling heights. It features a colour temperature of 3000 K and a luminous flux of 3450 lumens at a power consumption of 40 watts. The beam angle is 90°, allowing for directed light distribution. The luminaire is equipped with a rectangular canopy and has a suspension length of 200 cm, making it flexible for adaptation to different room heights. The housing is made of aluminium and steel, the luminaire is equipped with phase-cut dimming and has an IP20 rating as well as an impact resistance class of IK02. The installation height is 7.9 cm, the length 150 cm, and the width 0.76 cm. The LED lifetime is specified as 50,000 hours.



Item no.	1011944
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	64
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	1050
Safety class	I
Wattage	40 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	6.4e+14
Number of luminaires at LS C16A	128.0
Level of inrush current	15 A
Duration of inrush current	10 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	150 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.95 kg