
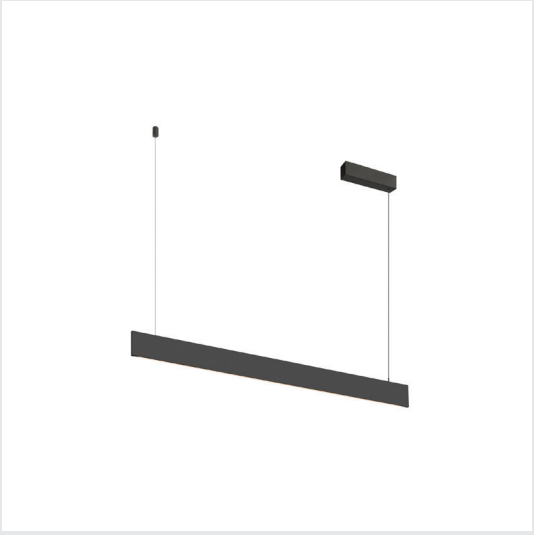


LINIUS 120 | PD, DALI, CANOPY

LINIUS 120, PD, DALI, CEILING ROSE, pendant luminaire, 2700 K, 34 W, 90°, black

The LINIUS 120 pendant luminaire is designed for indoor use and is particularly suitable for illuminating work and common areas. It offers a luminous flux of 3000 lumens with a colour temperature of 2700 K and a beam angle of 90°, providing a pleasant, warm white light. The luminaire features DALI-2 dimming for flexible light control. The housing is made of aluminium and comes with a rectangular ceiling rose for mounting. With a length of 121 cm, a width of 0.76 cm, and a height of 7.9 cm, the luminaire has a slim design. The suspension length is 200 cm. Protection class IP20 and impact resistance IK02 ensure safe use in protected indoor environments. The declared service life is 50,000 hours.



Item no.	1011950
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	I
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.65 kg