
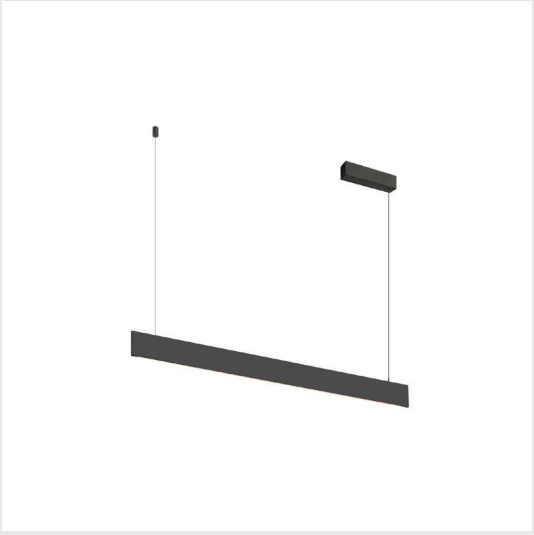


LINIUS 120 | PD, DALI, CANOPY

LINIUS 120, PD, DALI, CEILING ROSE, pendant luminaire, 3000 K, 34 W, 90°, black

The pendant light LINIUS 120 is designed for indoor use and is particularly suitable for office and work areas. It offers a luminous flux of 3100 lumens with a colour temperature of 3000 Kelvin and a beam angle of 90 degrees. The luminaire is equipped with DALI-2 dimming, allowing flexible control of the light intensity. The housing is made of aluminium and features a rectangular ceiling rose for mounting. With a length of 121 cm, a height of 7.9 cm, and a suspension length of 200 cm, it has a slim design. The protection rating IP20 and impact resistance class IK02 ensure reliable operation in protected indoor environments. The declared service life is 50,000 hours.



Item no.	1011952
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	I
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.65 kg