
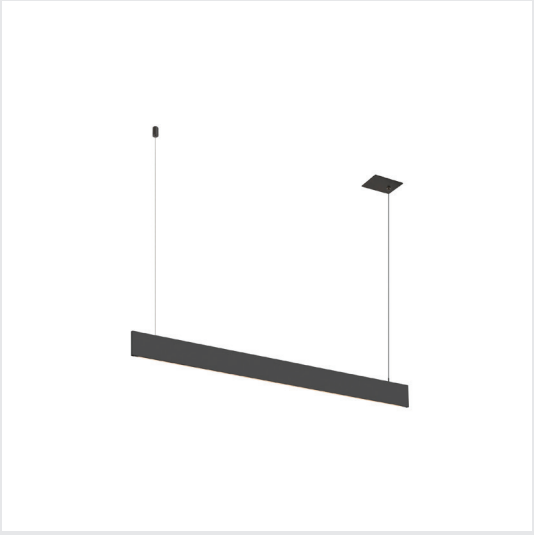


LINIUS 120 | PD, DALI RECESSED

LINIUS 120, PD, DALI, RECESSED, pendant luminaire, 2700 K, 34 W, 90°, black

The LINIUS 120 pendant luminaire is designed for ceiling installation and is particularly suitable for offices, meeting rooms, and similar indoor spaces. It delivers a luminous flux of 3000 lumens at a power consumption of 34 watts and features a warm white light colour of 2700 Kelvin. The luminaire has a rectangular canopy and is equipped with a round cut-out for recessed mounting. The housing is made of aluminium, with a protection rating of IP20 and impact resistance classified as IK02. The light distribution is provided with a beam angle of 90 degrees. Dimming is carried out via DALI 2. The pendant length is 200 cm; the luminaire measures 121 cm in length, 0.76 cm in width, and 7.9 cm in height. The declared LED lifetime is 50,000 hours.



Item no.	1011954
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	II
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.06 kg