
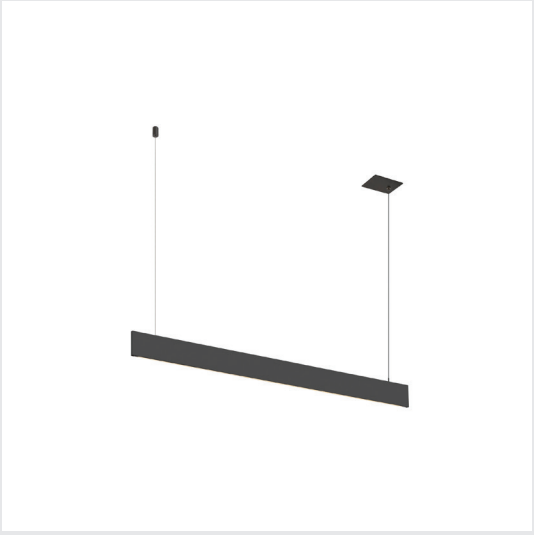


LINIUS 120 | PD, DALI RECESSED

LINIUS 120, PD, DALI, RECESSED, pendant luminaire, 3000 K, 34 W, 90°, black

The LINIUS 120 pendant luminaire is designed for ceiling installation and is suitable for indoor use. It delivers a luminous flux of 3100 lumens at 34 watts and a colour temperature of 3000 Kelvin, producing warm white light. The luminaire has a beam angle of 90° and is equipped with a DALI 2 dimming function, allowing flexible light control. The housing is made of aluminium and is finished in black. The dimensions are 121 cm in length, 0.76 cm in width, and 7.9 cm in height, with a pendant length of 200 cm. The protection rating is IP20, and the impact resistance corresponds to IK02 class. These technical features make the luminaire suitable for professional lighting in offices, conference rooms, or similar environments.



Item no.	1011956
IP Code	IP20
Impact resistance class	IK02
Assembly	Recessed
Assembly details	Ceiling,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	900
Safety class	II
Wattage	34 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	121 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.06 kg