
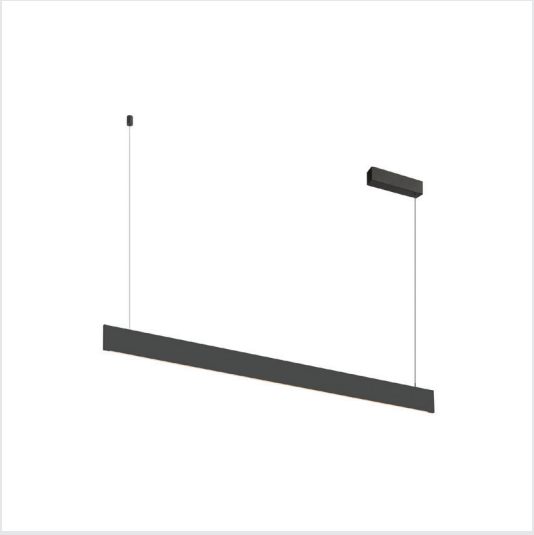


LINIUS 150 | PD, DALI, CANOPY

LINIUS 150, PD, DALI, CEILING ROSE, pendant luminaire, 2700 K, 40 W, 90°, black

The LINIUS 150 pendant light is designed for indoor use and is particularly suitable for ceiling mounting above tables or in open-plan spaces. It offers a luminous flux of 3350 lumens at a colour temperature of 2700 Kelvin and a beam angle of 90 degrees, providing pleasant, directed illumination. The luminaire features a DALI-2 dimming function, allowing flexible light control. The housing is made of aluminium and includes a rectangular ceiling rose. With a length of 150 cm and a suspension length of 200 cm, it can be adapted to various ceiling heights. The IP20 protection rating and IK02 impact resistance ensure reliable operation in protected indoor areas.



Item no.	1011958
IP Code	IP20
Impact resistance class	IK02
Assembly	Surface
Assembly details	Ceiling suspended,
Dimmable	true
Dimming technology	DALI 2
Number of through-wires	15
Primary nominal voltage	220-240V ~ 0/50/60Hz
Secondary power / voltage	1050
Safety class	I
Wattage	40 W
Minimum ambient temperature	0°C
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	15.0
Number of luminaires at LS C16A	24.0
Level of inrush current	65 A
Duration of inrush current	200 µs
Beam angle	90°
Color	black
CRI	90
LXXBXX data	L80B20
Service life	50 000 h
Risk Group	0
Length	150 cm
Width	0.8 cm
Height	7.9 cm
Pendant length	200.0000 cm
Net weight	2.95 kg