
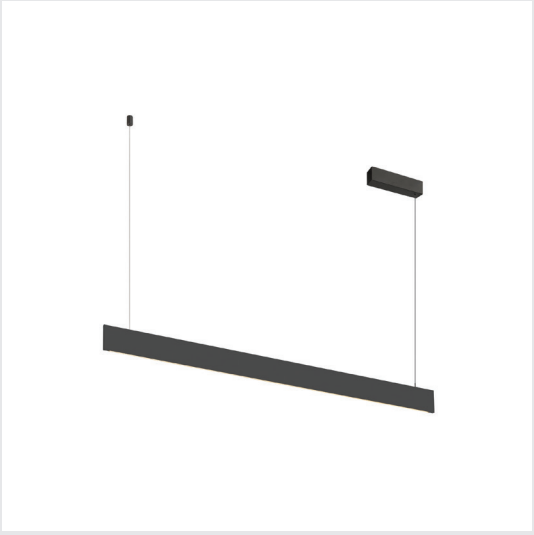


# LINIUS 150 | PD, DALI, CANOPY

**LINIUS 150, PD, DALI, CEILING ROSE, pendant luminaire, 3000 K, 40 W, 90°, black**

The pendant luminaire LINIUS 150 is designed for indoor use and is particularly suitable for ceiling mounting with a rectangular ceiling rose. It offers a luminous flux of 3450 lumens at a colour temperature of 3000 K and a beam angle of 90°. The luminaire is equipped with DALI-2 dimming, allowing flexible control. The housing is made of aluminium and measures 150 cm in length, 7.9 cm in height, and 0.76 cm in width. The suspension length is 200 cm. Protection class IP20 and impact resistance IK02 ensure reliable operation in protected indoor areas. The luminaire has a declared lifetime of 50,000 hours.




| | |
|---|---|
| **Item no.** | 1011960 |
| **IP Code** | IP20 |
| **Impact resistance class** | IK02 |
| **Assembly** | Surface |
| **Assembly details** | Ceiling suspended, |
| **Dimmable** | true |
| **Dimming technology** | DALI 2 |
| **Number of through-wires** | 15 |
| **Primary nominal voltage** | 220-240V ~ 0/50/60Hz |
| **Secondary power / voltage** | 1050 |
| **Safety class** | I |
| **Wattage** | 40 W |
| **Minimum ambient temperature** | 0°C |
| **Maximum ambient temperature** | 45°C |
| **Number of luminaires at LS B16A** | 15.0 |
| **Number of luminaires at LS C16A** | 24.0 |
| **Level of inrush current** | 65 A |
| **Duration of inrush current** | 200 µs |
| **Beam angle** | 90° |
| **Color** | black |
| **CRI** | 90 |
| **LXXBXX data** | L80B20 |
| **Service life** | 50 000 h |
| **Risk Group** | 0 |
| **Length** | 150 cm |
| **Width** | 0.8 cm |
| **Height** | 7.9 cm |
| **Pendant length** | 200.0000 cm |
| **Net weight** | 2.95 kg |