
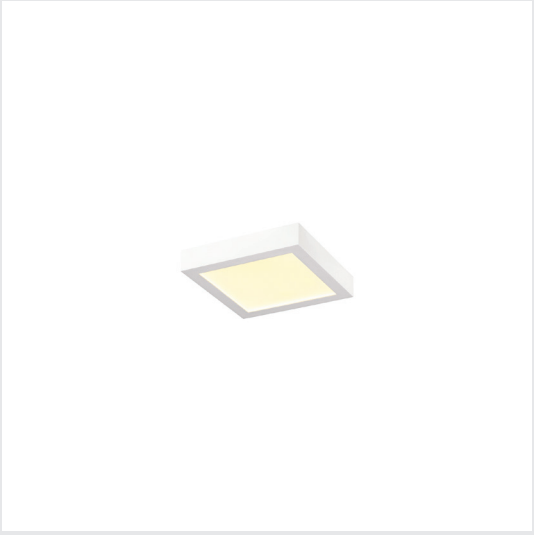


SENSER 2.0 24 | CW, SQUARE, PHASE

SENSER 2.0 24, CW, square, PHASE, surface-mounted wall and ceiling luminaire, 3000 K / 4000 K, 23 W, 90°, white

The SENSER 2.0 24 is a square surface-mounted wall and ceiling luminaire suitable for indoor use. It delivers a luminous output of 2250 to 2400 lumens with a colour temperature of 3000 K or 4000 K. The luminaire operates at a power of 23 watts and features a beam angle of 90°. The housing is made of aluminium, while the diffuser is manufactured from polycarbonate. Installation is possible on wall or ceiling. Dimming is achieved via phase-cut control (Trailing Edge). The protection rating is IP20, and the luminaire has an impact resistance of class IK02. With a compact installation height of 4 cm and a base size of 22.5 x 22.5 cm, the luminaire is suitable for a wide range of installations. The declared lifetime is 50,000 hours.



Item no.	1012218
Lamps included	No
IP Code	IP20
Impact resistance class	IK02
Impact resistance	0.2 Joule
Assembly	Surface
Assembly details	Ceiling,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	50
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	700 mA
Safety class	I
Wattage	23 W
Minimum ambient temperature	-20°C
Maximum ambient temperature	40°C
Number of luminaires at LS B16A	100.0
Number of luminaires at LS C16A	100.0
Level of inrush current	5 A
Duration of inrush current	100 µs
Beam angle	90°
Color	white
CRI	90
UGR ≤	25
LXXBXX data	L80B10
Service life	50 000 h
Risk Group	1
Length	22.5 cm
Width	22.5 cm