



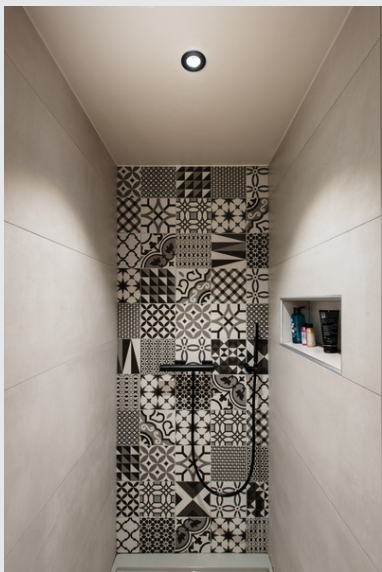

PATTA-I

recessed fitting, LED, 3000K, round, matt black, 38°, incl. driver

The innovative PATTA I recessed fitting is suitable for ceiling thicknesses of up to 25 mm. Rated IP65 it can be used outdoors or in damp areas. This set is available in matt black, matt white, or brushed aluminium as well as in round or square form. Equipped with a powerful, warm white premium COB LED in a rigid mount, as well as the dimmable LED driver included in the scope of supply, the set can be used in any lighting situation. The electrical connection is made directly to the 230V mains supply.



Tekniske data

Item no.	114420
IP klasse	IP20/IP65
Montering	Recessed
Monterings detaljer	Ceiling
Dæmpbar	Ja
Dæmpningstype	Leading edge, trailing edge
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	500mA
IP Tæthedsggrad	II
Watt	11 W
Omgivelsestemperatur	25 °C
Min omgivelsestemperatur	-20 °C
Max omgivelsestemperatur	50 °C
Lumen	910 lm
Farvetemperatur	3000 Kelvin
Spredningsvinkel	38 °
Farve	black
CRI	80
LXXBXX-data	L70B50
Højde	4.5 cm
Diameter	8 cm
Nettovægt	0.254 kg

Lyskilde

916451	
--------	---

Bruttovægt	0.3 kg
Indbygningsdybde	6 cm
Installations diameter	6 cm
BIG WHITE side	245