



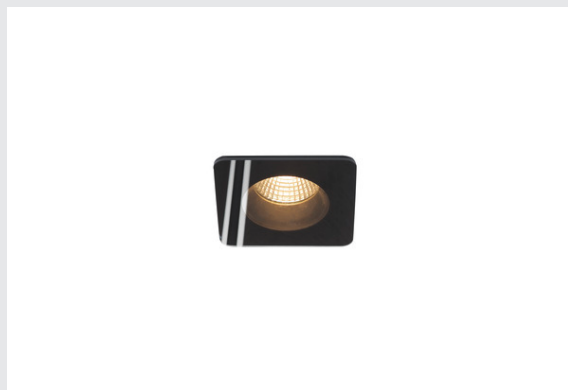

PATTA-F

recessed fitting, LED, 3000K, square, matt black, 38°, incl. driver

The innovative PATTA F recessed fitting is suitable for ceiling thicknesses of up to 20 mm. Rated IP65 it can be used outdoors or in damp areas. This set is available in matt black, white, or brushed aluminium as well as in round or square form. Equipped with a powerful, warm white premium COB LED in a tiltable mount, as well as dimmable LED driver included in the scope of supply, the set can be used in any lighting situation. The electrical connection is made directly to the 230V mains supply.



Tekniske data

Item no.	114450
IP klasse	IP20/IP65
IK Vandalklasse	IK02
Montering	Recessed
Monterings detaljer	Ceiling
Dæmpbar	Ja
Dæmpningstype	Leading edge,trailing edge
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	500mA
IP Tæthedsgard	II
Watt	11 W
Lumen	745 lm
Farvetemperatur	3000 Kelvin
Spredningsvinkel	38 °
Farve	black
CRI	80
LXXBXX-data	L70B50
Længde	8.3 cm
Bredde	8.3 cm
Højde	6.2 cm
Nettovægt	0.327 kg
Bruttovægt	0.396 kg

Lyskilde

916451		Indbygningsdybde	6 cm
		Installations diameter	7 cm
		BIG WHITE side	247