



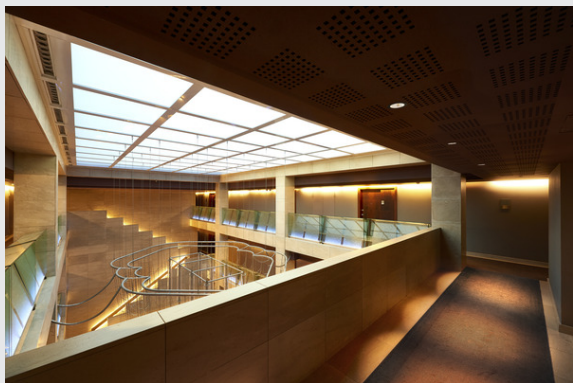

H-LIGHT 3

recessed fitting, LED, 2700K, reflector, black, 20°, 12-W, incl. driver, clip spring

The H-LIGHT 3 recessed fitting series impresses with its simple and elegant design, the integrated warm-white LED module with its narrow 20° beam angle ensures a discreet and ambience-oriented radiance. Thanks to the LED driver included in the set, the luminaire is immediately ready for connection to a 230V power supply.



Tekniske data

Item no.	114500
IP klasse	IP20
Montering	Recessed
Monterings detaljer	Ceiling
Dæmpbar	Ja
Dæmpningstype	Leading edge, trailing edge
Primær spænding	220-240V ~50/60Hz
Sekundær strøm / spænding	500mA
IP Tæthedsggrad	II
Watt	11 W
Lumen	540 lm
Farvetemperatur	2700 Kelvin
Spredningsvinkel	20 °
Farve	black
CRI	80
LXXBXX-data	L70B50
Højde	8 cm
Diameter	9 cm
Nettovægt	0.324 kg
Bruttovægt	0.382 kg
Indbygningsdybde	8 cm
Installations diameter	8 cm

Lyskilde

916341	A G E
--------	---