



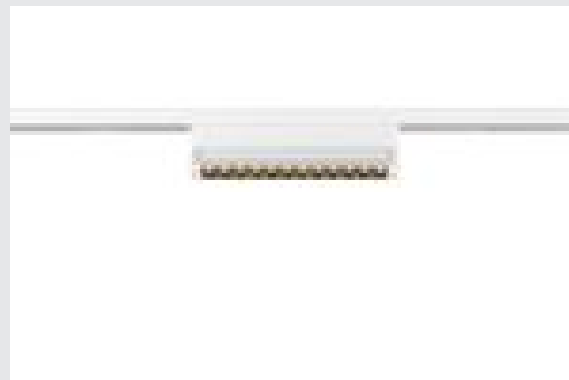

IN-LINE 24 48V TRACK

Move DALI, Darklight Reflector, spot, white / white, 7.3 W, 580 lm, 2700 K, CRI 90, 35°

Plain linear luminaires for a particularly elegant look: the IN-LINE spotlight is concealed within a 48V TRACK system, allowing only the best feature to surface: high-quality light with a 35° beam angle in various lumen, adjustable lighting colour via a CCT switch (2700 K/3000 K/4000 K) and natural colour reproduction (CRI >90). As a result, the DARKLIGHT REFLECTOR creates an atmosphere that particularly showcases restaurants, bars and hotels in a new light. The DALI-compatible and pivoting IN-LINE linear luminaires are also quick and easy to install via a track adapter.



TECHNICAL DATA

Item no.	1006640
Number of different light outlets	1
Rotating or tilting	tiltable
IP Code	IP20
Impact resistance class	IK 02
Impact resistance	0.2 Joule
Dimmable	Yes
Dimming technology	DALI
Primary nominal voltage	48DC
Secondary power / voltage	350 mA
Safety class	III
Wattage	7.3 W
Minimum ambient temperature	-20 °C
Maximum ambient temperature	35 °C
Lumen	580 lm
Colour temperature	2700 Kelvin
Beam angle	35 °
Color	white/white
CRI	90
UGR ≤	16
Service life	50000 h
Risk Group	1

Light Source

2115946		Length	24 cm
		Width	2.2 cm
		Height	5.8 cm
		Net weight	0.337 kg
		Gross weight	0.389 kg
		BIG WHITE Page	527